



TOTAL E&P PNG LIMITED **PAPUA LNG**

Upstream Environmental Impact Statement **Volume 3: Technical Studies**

Part 4
Marine Modeling for Impact Assessment





Marine Modeling for Impact Assessment

Reference: R.B21414.002.03F.docx
Date: July 2019
Confidential



Document Control Sheet

BMT Eastern Australia Pty Ltd Level 8, 200 Creek Street Brisbane Qld 4000 Australia PO Box 203, Spring Hill 4004 Tel: +61 7 3831 6744 Fax: +61 7 3832 3627 ABN 54 010 830 421 www.bmt.org	Document:	R.B21414.002.03F.docx
	Title:	Marine Modeling for Impact Assessment
	Project Manager:	Jeremy Visser
	Author:	Paul Guard, Daniel Machado
	Client:	ERIAS Group
	Client Contact:	Clark Monahan
	Client Reference:	01215B
Synopsis: Report detailing modeling activities undertaken to impacts of trenching and dredging activities to marine environment for Papua LNG project impact assessment.		

TECHNICAL REPORT SERIES

Report Number	Description
3	<i>Papua LNG Project Marine Impact Assessment Modeling Report</i>

REVISION/CHECKING HISTORY

No.	Date	Checked by		Issued by	
A – Internal Draft (Orokolob Bay)		-			
B – First Draft	26 th April 2019	JDV		JDV	
C – Draft for Issue (ERIAS)	27 th June 2019	PAG		JDV	
D – Final for Issue (ERIAS)	1 st July 2019	DLR		JDV	
E – Final for Issue (Total)	10 th July 2019	PAG		JDV	
F – Reissue (title change)	16 th July 2019	PAG		JDV	

DISTRIBUTION

Destination	Revision										
	A	B	C	D	E	F	G	H	I	J	K
ERIAS Group	-	PDF	PDF	PDF	PDF	PDF					
BMT File	-	PDF	PDF	PDF	PDF	PDF					
BMT Library	-	-	-	-	-	-					

Copyright and non-disclosure notice

The contents and layout of this report are subject to copyright owned by BMT Eastern Australia Pty Ltd (BMT EA) save to the extent that copyright has been legally assigned by us to another party or is used by BMT EA under licence. To the extent that we own the copyright in this report, it may not be copied or used without our prior written agreement for any purpose other than the purpose indicated in this report. The methodology (if any) contained in this report is provided to you in confidence and must not be disclosed or copied to third parties without the prior written agreement of BMT EA. Disclosure of that information may constitute an actionable breach of confidence or may otherwise prejudice our commercial interests. Any third party who obtains access to this report by any means will, in any event, be subject to the Third Party Disclaimer set out below.

Third Party Disclaimer

Any disclosure of this report to a third party is subject to this disclaimer. The report was prepared by BMT EA at the instruction of, and for use by, our client named on this Document Control Sheet. It does not in any way constitute advice to any third party who is able to access it by any means. BMT EA excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage howsoever arising from reliance on the contents of this report.

Contents

1	Introduction	1
1.1	Project Overview	1
1.2	Assessment Context	1
2	Project Description and Assumptions	2
2.1	Pipeline Alignment	2
2.2	Pipeline Construction Methodology	2
3	Modeling Method	8
3.1	Modeling Scenarios	8
3.2	Dredging Source Rates	10
3.2.1	Orokolo Bay	10
3.2.2	Caution Bay	10
4	Modeling Results	11
4.1	Orokolo Bay – Northwest Monsoon Season	11
4.2	Orokolo Bay – Southeast Trade Winds Season	11
4.3	Caution Bay (Northern Alignment) – Northwest Monsoon Season	15
4.4	Caution Bay (Northern Alignment) – Southeast Trade Winds Season	15
4.5	Caution Bay (Southern Alignment) – Northwest Monsoon Season	19
4.6	Caution Bay (Southern Alignment) – Southeast Trade Winds Season	19

List of Figures

Figure 1-1	Offshore Export Pipeline Route	1
Figure 2-1	Onshore Pipeline Route and Orokolo Bay Landfall	4
Figure 2-2	Orokolo Bay Pipeline Alignment Modeled for Impact Assessment	5
Figure 2-3	Export Pipeline Approach to Landfall at Caution Bay	6
Figure 2-4	Caution Bay Export Pipeline Alignments Modeled for Impact Assessment	7
Figure 4-1	Depth-average TSS Increases (95 th and 50 th Percentile) from Trenching in Orokolo Bay During Northwest Monsoon Season	12
Figure 4-2	Depth-averaged TSS Increase (95 th and 50 th Percentile) from Trenching in Orokolo Bay During Southeast Trade Winds Season	13
Figure 4-3	Final Net Deposition of Sediment Mobilized from Trenching in Orokolo Bay – Both Seasons	14
Figure 4-4	Depth-averaged TSS Increase in Caution Bay (95 th and 50 th Percentile) from Trenching in Caution Bay During Northwest Monsoon Season -Northern Alignment	16

Contents

Figure 4-5	Depth-averaged TSS Increase (95 th and 50 th Percentile) from Trenching at Caution Bay During Southeast Trade Winds Season - Northern Alignment	17
Figure 4-6	Final Net Deposition of Sediment Mobilized from Trenching at Caution Bay - Northern Alignment Both Seasons	18
Figure 4-7	Depth-averaged TSS Increase (95 th and 50 th Percentile) from Trenching at Caution Bay During Northwest Monsoon Season - Southern Alignment	20
Figure 4-8	Depth-averaged TSS Increase (95 th and 50 th Percentile) from Trenching at Caution Bay During Southeast Trade Winds Season - Southern Alignment	21
Figure 4-9	Final Net Deposition of Sediment from Trenching at Caution Bay - Southern Alignment Both Seasons	22

List of Tables

Table 3-1	Modeling Scenarios for Marine Impact Assessment	9
-----------	---	---

1 Introduction

1.1 Project Overview

Total E&P PNG Limited (TEP PNG), a wholly-owned subsidiary of TOTAL S.A., is the leading joint venture partner for the Papua LNG Project (the Project). This Project involves the development of the Elk-Antelope gas field, which is located in Petroleum Retention License 15 (PRL-15) in Gulf Province, Papua New Guinea.

The Project includes two offshore export pipelines, running through the Gulf of Papua from Orokolo Bay in Gulf Province to Caution Bay in National Capital District. The pipelines will be buried along their nearshore reaches. This will require trenching (by dredger), pipeline placement and reburial.

Figure 1-1 shows the indicative marine pipeline corridor.

1.2 Assessment Context

In accordance with Papua New Guinea legislation, International Finance Corporation (IFC) Performance Standards, and TOTAL's corporate policies and standards, an environmental impact statement/environmental, social and health impact assessment (EIS/ESHIA) is being developed for the Project.

An important element of the EIS/ESHIA is quantifying the potential impact to the marine environment from the trenching activities. Dredging of the seabed and pipeline burial will cause seabed sediment to become suspended in the water column, causing changes in water quality with potential implications for sensitive marine biota. Modeling has therefore been undertaken to inform the assessment of the impacts of these activities.

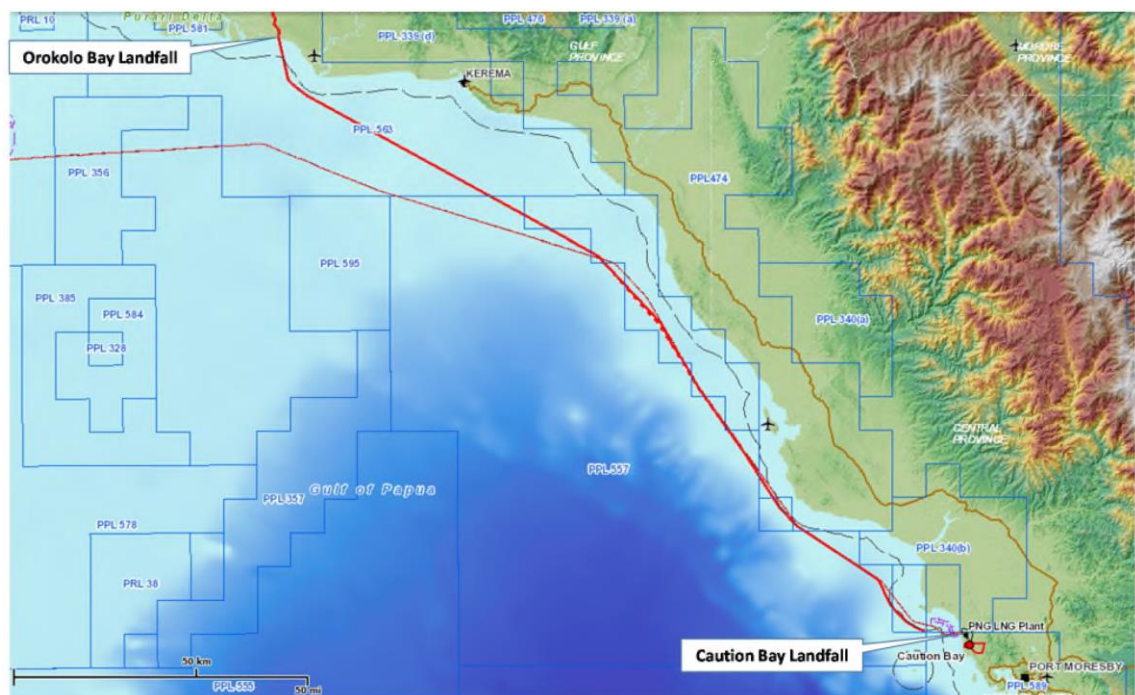


Figure 1-1 Offshore Export Pipeline Route

2 Project Description and Assumptions

2.1 Pipeline Alignment

The Project consists of separate gas and condensate export pipelines connecting an upstream central processing facility (CPF) in PRL-15 with a downstream liquefied natural gas (LNG) plant at Caution Bay. Both pipelines will follow the same route, including an offshore section of approximately 260 km through the Gulf of Papua. The gas export pipeline will be 40 inches (1 meter) in diameter while the condensate export pipeline will be 10 inches (0.25 meter) in diameter.

The proposed landfall location for the pipelines at Orokolo Bay is shown in Figure 2-1. As described in Part 9 of Volume 2, the proposed route through Orokolo Bay is not known to pass through any marine wetland environments or areas of reef, although it runs near to a rocky outcropping (near Site A in Figure 2-2).

From here the pipeline alignment runs to the southeast through the Gulf of Papua to Caution Bay, with a minimum distance of 5 km between the pipeline route and shore (Figure 1-1). This 5 km buffer necessitates a crossing of the PNG LNG Gas Pipeline approximately midway between Orokolo and Caution bays.

A final alignment has not been decided within Caution Bay; however, a pipeline corridor has been identified (Figure 2-3). Finalization of the pipeline alignment will be undertaken during the front-end engineering design (FEED) phase for the Project. TEP PNG has a preference that the pipelines do not cross the existing PNG LNG Gas Pipeline within this corridor, thereby necessitating a final landfall at Caution Bay that is to the south of the existing pipeline. For the purposes of the impact assessment modeling; however, TEP PNG has provided two indicative alignments at Caution Bay with one to the north and the other to south of the PNG LNG Gas Pipeline (Figure 2-4). These alignments are indicative only, and require further refinement following updated seabed mapping and engineering studies. Importantly, both alignments indicate the intention of TEP PNG for an approach through the center of Caution Bay that will pass between major barrier reef features.

2.2 Pipeline Construction Methodology

Pipeline installation will be undertaken by dedicated pipelaying vessel. This utilizes a continuous process of joining and lowering pipe sections from a lead pipelaying vessel, with resupply of new pipe sections from supporting pipe supply vessels.

In shallow areas, the pipeline will be laid in a trench and then buried to provide for stabilization and protection. The trench needs to be deep enough and wide enough to allow complete placement and burial of the pipelines. It is assumed, therefore, that the trench depth will be 2 m (allowing up to 1 m insurance for the condensate pipeline) and trench width will be 6 m. For the purpose of the modeling, it was also assumed that trenching will occur from the coast to the -15 m below LAT depth contour and would occur through both soft and hard sediment types. The method for trenching is not yet determined but, for the purposes of the impact assessment, it was assumed that it will be carried out by a cutter suction dredger (CSD). It is possible that a backhoe dredge may be used instead, but a CSD would likely involve a higher plume release rate and is therefore considered to provide a conservative scenario (in terms of plume dispersion outcomes).

Based on sediment classes identified during the ESBS studies (described in Part 9 of Volume 2), there are no stiff clays expected in the area to be trenched. Without more detailed geophysical data, it is therefore assumed that the only materials in these areas will be soft sediment, or reef in the case of Caution Bay.


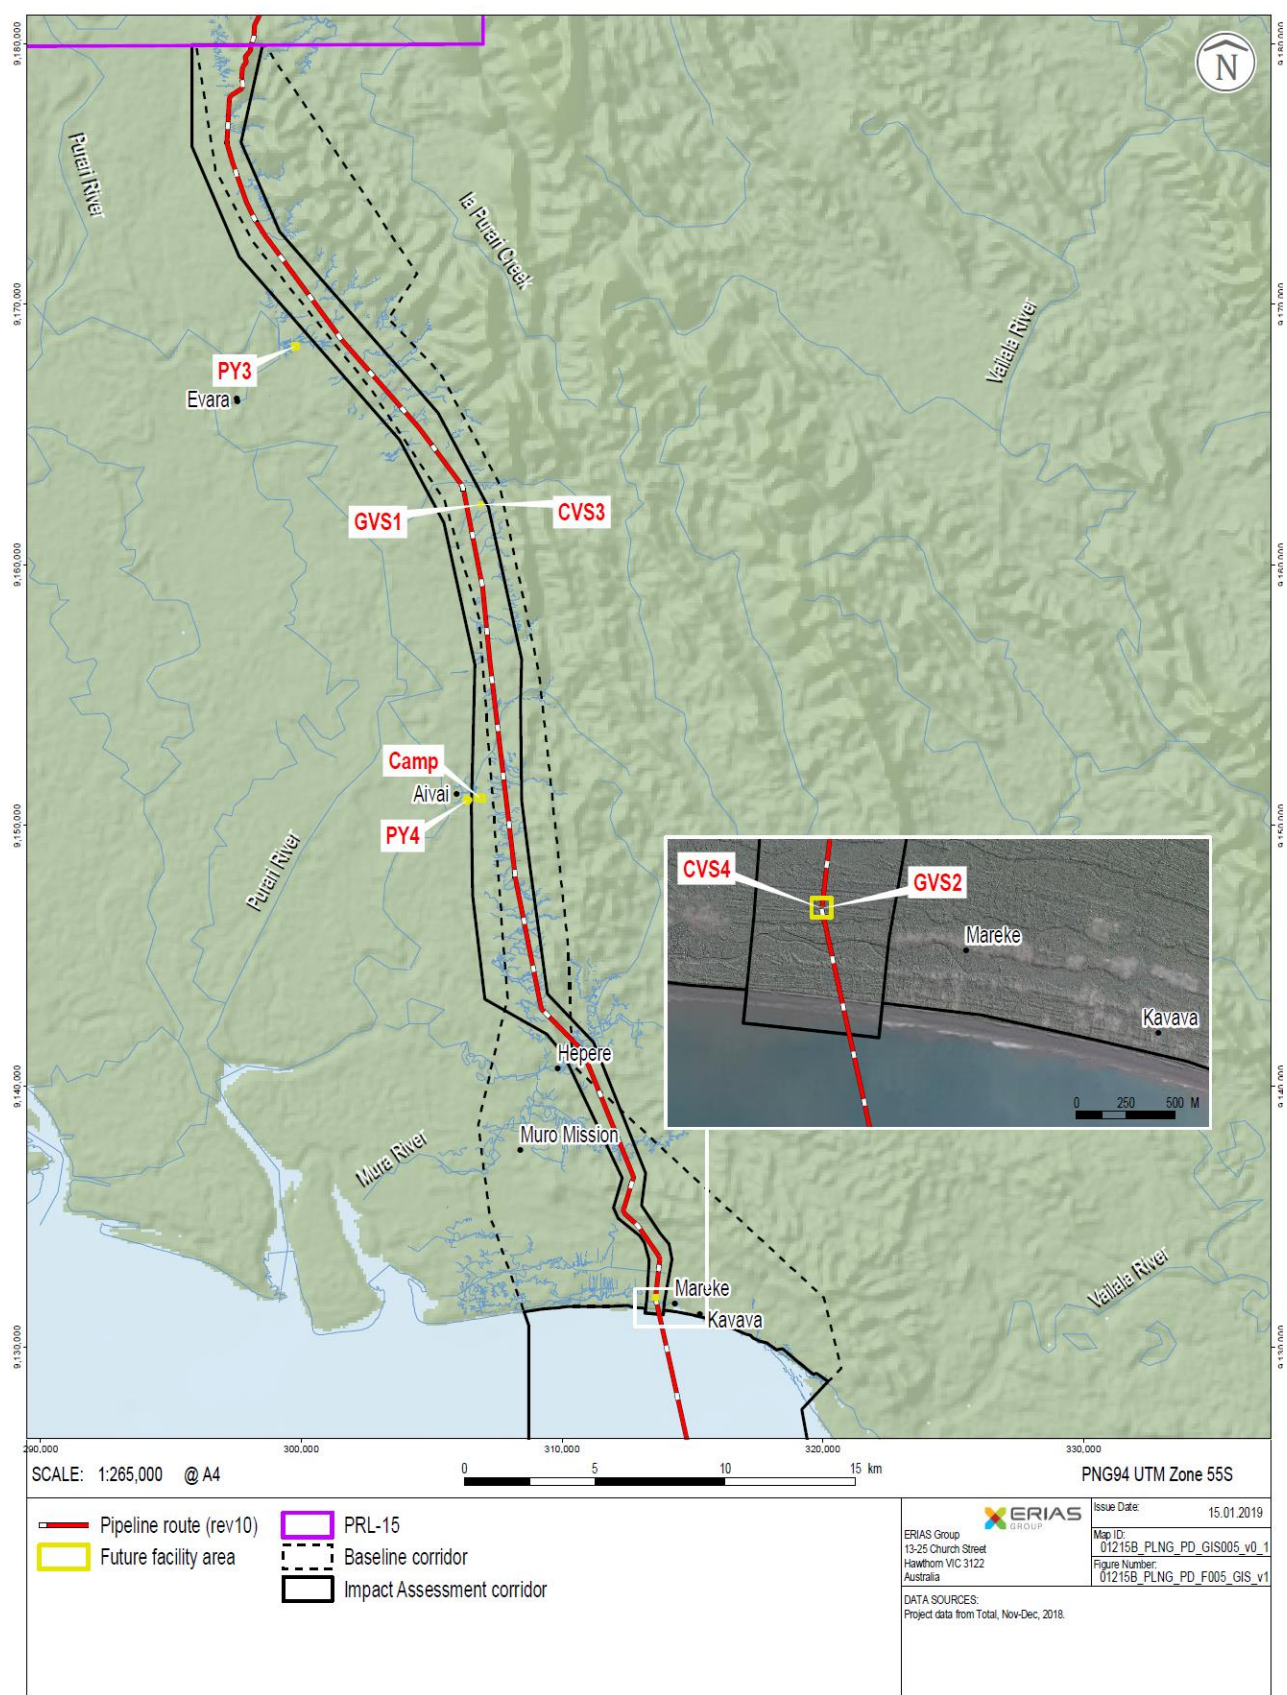


Figure 2-1 Onshore Pipeline Route and Orokelo Bay Landfall

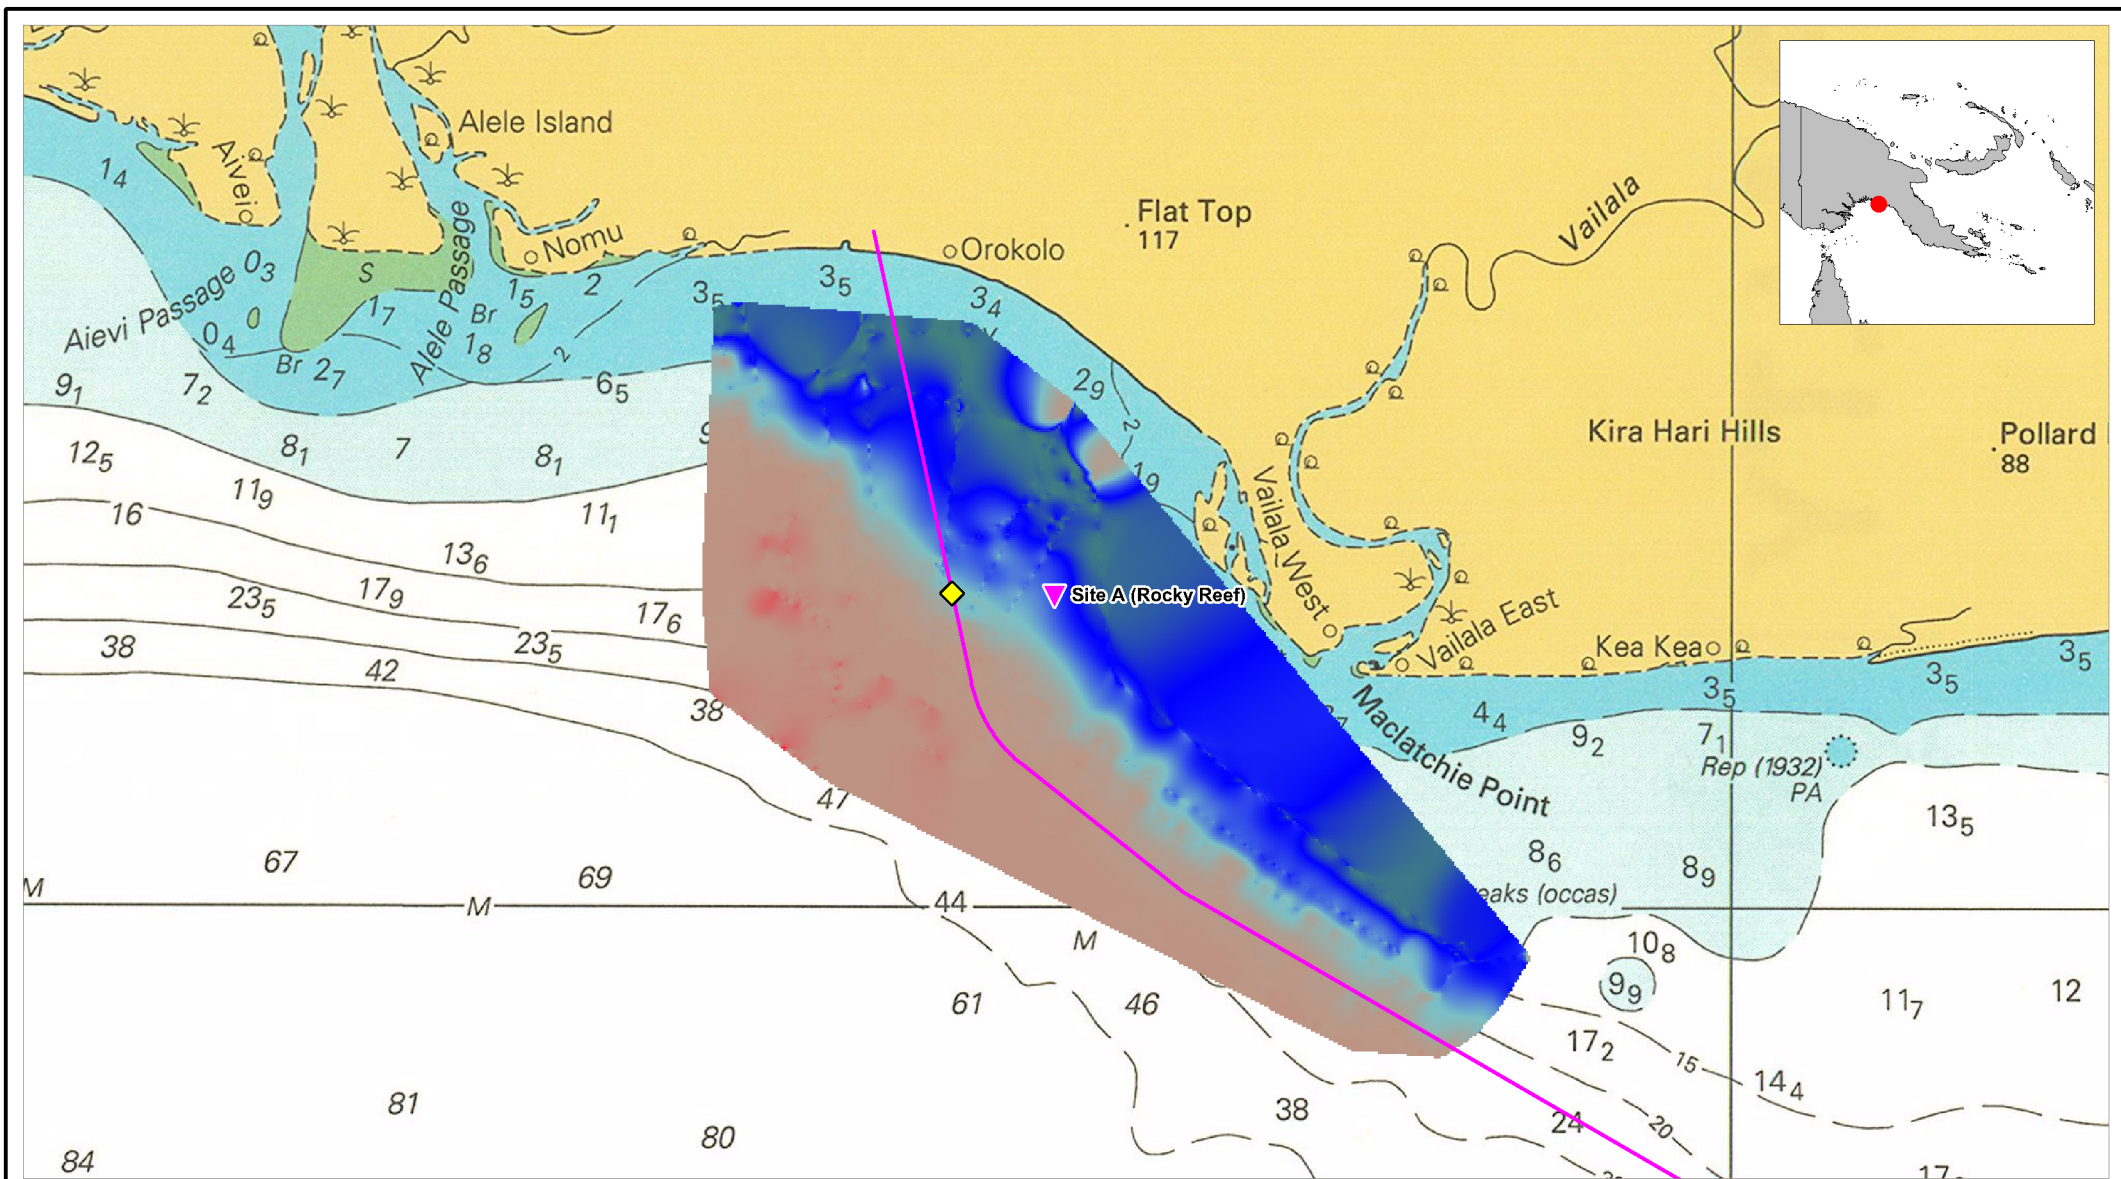

LEGEND

- Potential Papua LNG Pipeline Routes
- ◆ Extent of Modelling
- ▼ Location of Rocky Reef

Benthic Habitat Classes

- 1. Silty substrate with debris
- 2. Textured silty mud with 25-30% clay
- 3. Uniform silty mud
- 4. Uniform silty clay
- 5. Higher relief bed structures

Title:

Orokolo Bay Pipeline Alignment Modeled for Impact Assessment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.




Figure:

2-2

Rev:


A



Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_J\DRG\ECO_089_190627_Orokolo_Bay_Pipeline_Impact.wor



Figure 2-3 Export Pipeline Approach to Landfall at Caution Bay

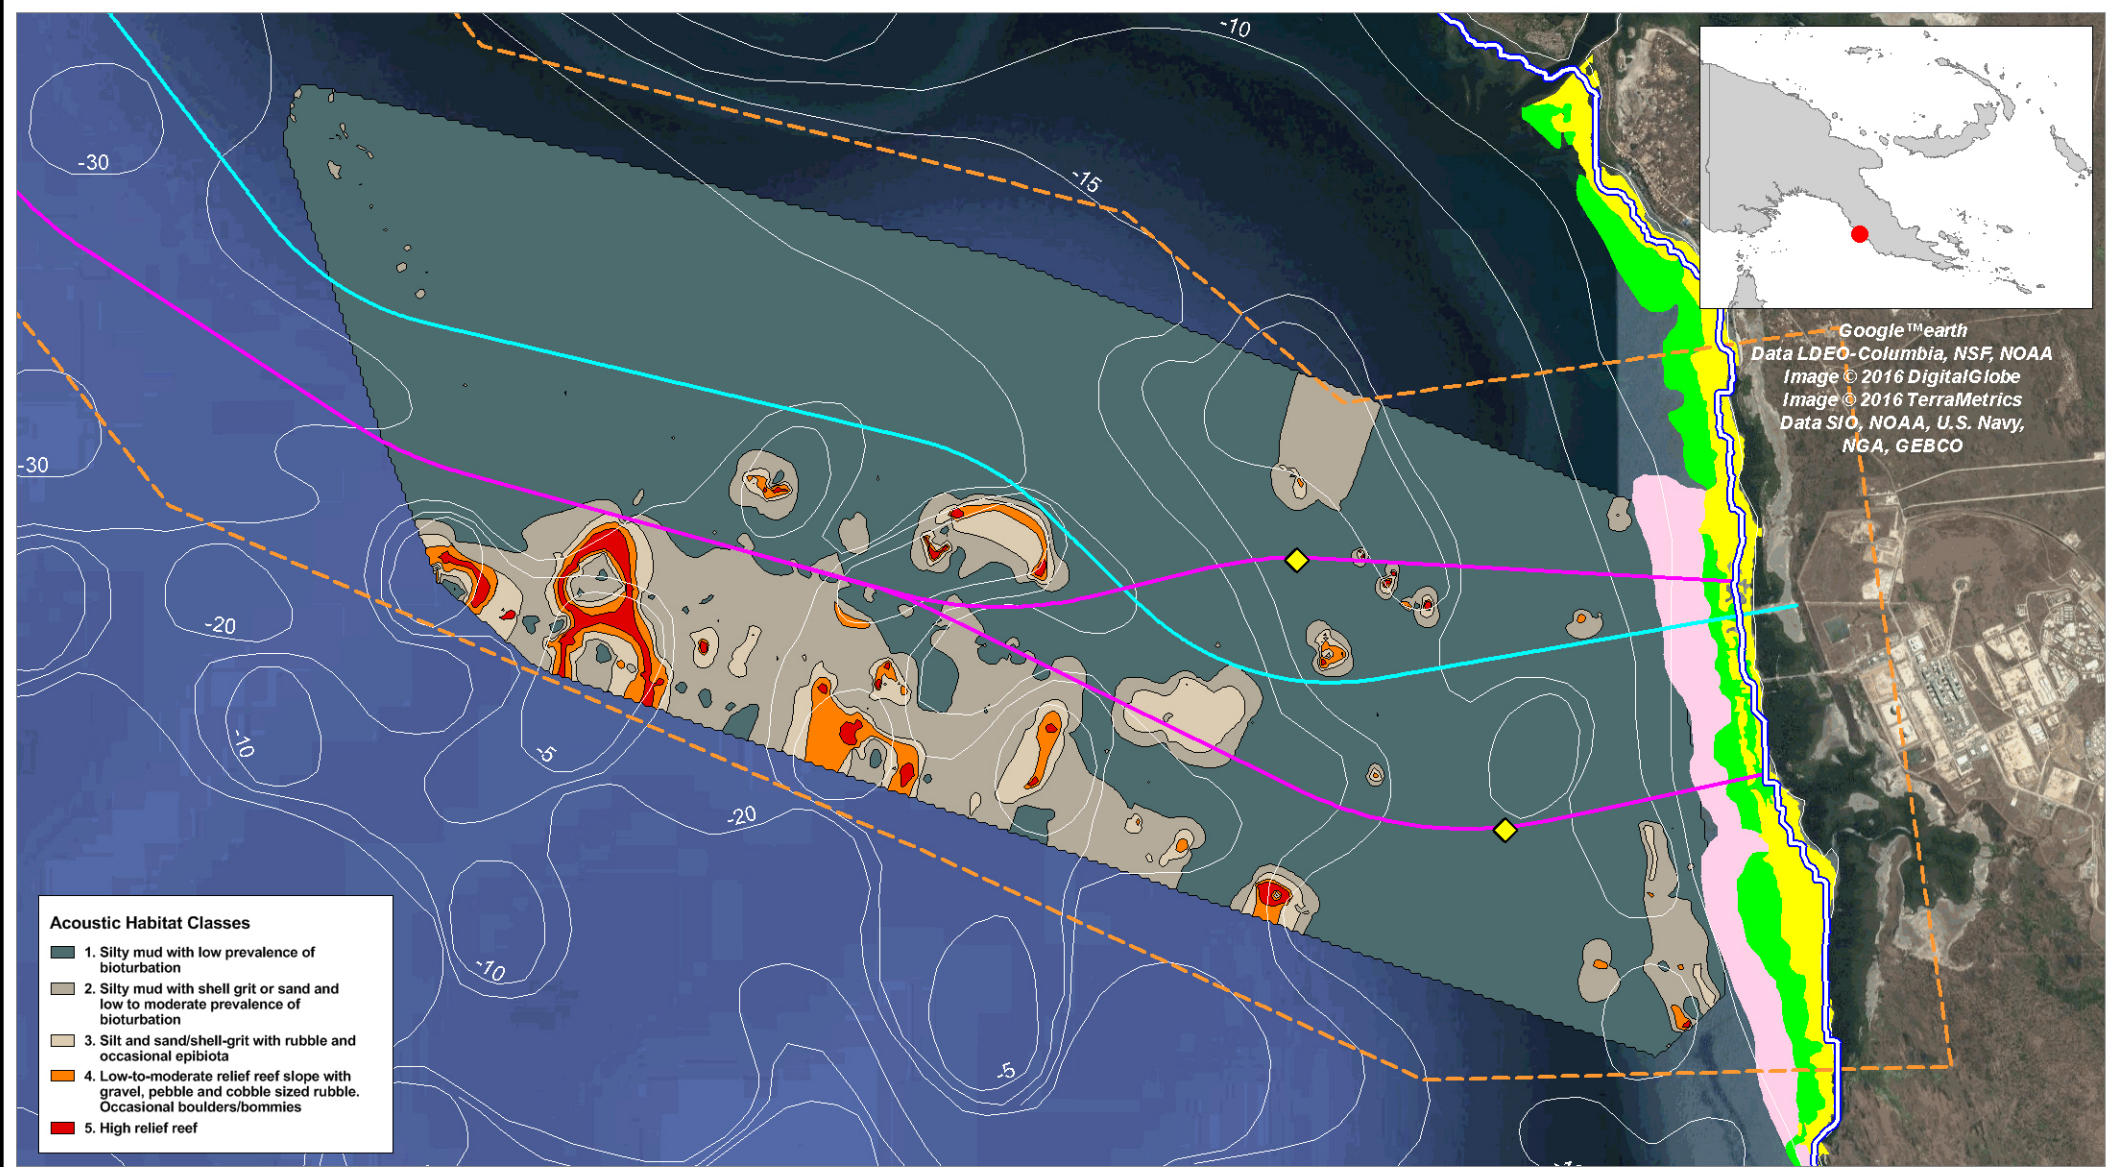

LEGEND Pipeline Corridor PNG LNG Pipeline Potential Papua LNG Pipeline Routes Lowest Astronomical Tide Extent of Modelling		CNS (2009) Marine Habitat Coral Reef (Fringing Reef) Seagrass Submerged sand patches		Title: Caution Bay Export Pipeline Alignments Modeled for Impact Assessment	Figure: 2-4	Rev: A
BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.				N 0 2 4km Approx. Scale		 www.bmt.org
Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_J\VDRG\ECO_088_190627_caution_bay_export_pipeline.wor						

3 Modeling Method

This section describes the modeling method used as part of this assessment. This method built on modeling already undertaken during the baseline phase of the EIS/ESHIA, therefore the methods set out below should be read in conjunction with the Marine Waters Modeling Report (Appendix A to Part 10 of Volume 2). Descriptions of the model development, calibration and validation results are presented in that report.

For the purpose of the impact assessment, updates to the model bathymetry were applied locally at both Caution Bay and Orokolo Bay by assimilating local survey depth data collected by BMT during the baseline surveys. These data were obtained from single beam sounding during the habitat mapping campaign in June to July 2016 (Orokolo Bay) and January 2017 (Caution Bay). Sounding data were quality assured, tide corrected, and datum adjusted. The data were then overlaid on previously available data and thus provided up-to-date bathymetry for the trenching impact modeling assessment.

3.1 Modeling Scenarios

Construction of the Project infrastructure will not cause permanent changes to the seabed profile in areas shallower than -15 m LAT, hence no long-term impacts to hydrodynamics or coastal processes are expected. Consequently, there was no need to undertake modeling to assess long-term alterations in hydrodynamic behavior and sediment transport in Orokolo Bay or Caution Bay.

The most relevant impact for assessment by modeling is water quality changes and sedimentation, i.e., sediment plume dispersion and settling, due to sediment mobilized by trenching and burial of pipelines. In relation to this, modeling was undertaken considering conservative scenarios to ensure the impacts presented in the impact assessment reflect what could happen during construction.

At Orokolo Bay, impacts on turbidity due to trenching and burial activities were modeled under conditions of both the southeast trade winds season and the northwest monsoon season, i.e., two scenarios, so that any seasonal differences are captured.

As described in Section 2.1, two alternative pipeline alignments are under consideration at Caution Bay with one to the north (northern alignment) and the other to south (southern alignment) of the PNG LNG Gas Pipeline. Modeling of each alignment was undertaken under both southeast trade winds season and northwest monsoon season conditions, providing four scenarios for Caution Bay. The indicative alignments for Caution Bay are based on information available at the time of the modeling investigation. If an alternative alignment is selected based on further considerations during FEED, the impact radius of the dredging-related plumes on either side of the new pipeline alignment would be expected to be very similar to the scenarios modeled.

Table 3-1 describes the six scenarios, agreed with TEP PNG, that were modeled. Simulations were undertaken for the duration of the entire trenching campaigns. This involved modeling of the hydrodynamics and wave and sediment transport processes for each scenario with the addition of the moving suspended (and seabed) sediment point source discharge at the assumed location of the trenching equipment at every model timestep.

Modeling Method

Table 3-1 Modeling Scenarios for Marine Impact Assessment

No.	Description	Alignment	Assumptions
1	Orokolo Bay – southeast trade winds	As per Figure 2-2	- Trench from shore to -15 m LAT depth contour. - Trench width of 6 m and depth of 2 m. - Trenching of all sediment by cutter suction dredger with material discharged directly to surrounding environment. - Burial by ploughing or jetting. - Southeast trade winds season.
2	Orokolo Bay – northwest monsoon	As per Figure 2-2	- Trench from shore to -15 m LAT depth contour. - Trench width of 6 m and depth of 2 m. - Trenching of all sediment by cutter suction dredger with material discharged directly to surrounding environment. - Burial by ploughing or jetting. - Northwest monsoon season.
3	Caution Bay (northern alignment) – southeast trade winds	As per Figure 2-4	- Trench from shore to -15 m LAT depth contour. - Trench width of 6 m and depth of 2 m. - Trenching of soft sediment by cutter suction dredger with material discharged directly to surrounding environment. - Burial of soft sediment trench by ploughing or jetting. - Southeast trade winds season.
4	Caution Bay (northern alignment) – northwest monsoon	As per Figure 2-4	- Trench from shore to -15 m LAT depth contour. - Trench width of 6 m and depth of 2 m. - Trenching of soft sediment by cutter suction dredger with material discharged directly to surrounding environment. - Burial of soft sediment trench by ploughing or jetting. - Northwest monsoon season.
5	Caution Bay (southern alignment) – southeast trade winds	As per Figure 2-4	- Trench from shore to -15 m LAT depth contour. - Trench width of 6 m and depth of 2 m. - Trenching of soft sediment by cutter suction dredger with material discharged directly to surrounding environment. - Burial of soft sediment trench by ploughing or jetting. - Southeast trade winds season.
6	Caution Bay (southern alignment) – northwest monsoon	As per Figure 2-4	- Trench from shore to -15 m LAT depth contour. - Trench width of 6 m and depth of 2 m. - Trenching of soft sediment by cutter suction dredger with material discharged directly to surrounding environment. - Burial of soft sediment trench by ploughing or jetting. - Northwest monsoon season.

Modeling periods were chosen that had meteorological conditions that were representative of the long-term average conditions (March 2015 for the monsoon season and July 2015 for the southeast trade winds season).

For each scenario the model was run for one month; configured with one week of spin-off time prior to applying the trenching discharge (of one to five days duration depending on the scenario) followed by the remaining time to complete a full month simulation.

3.2 Dredging Source Rates

3.2.1 Orokolo Bay

Based on the proposed alignment and assumed dimensions of the trench to be excavated, the total volume of material to be dredged along the alignment within Orokolo Bay (to the -15 m LAT contour) is approximately 100,000 m³. Assuming a cutter suction dredger achieves a production rate of 1,250 m³/h, operating for 70% of the time (assumed 30% down time), the expected duration of the dredging campaign is 4.75 days. The assumed rate of loss of material to the water column (forming a suspended sediment plume) was 10%, which is a conservative assumption given the lack of knowledge of the operating specifications of the dredger to be used. The remaining 90% of material was added directly to the seabed adjacent to the trench in the numerical model. It was assumed that all the dredged material discharged either into the water column or deposited on the seabed is subject to water current and wave-induced resuspension processes, which were explicitly modeled to provide conservatism to the impact assessments.

The particle size distributions of sediment samples collected in Orokolo Bay during the baseline studies are presented in Part 9 of Volume 2. Analysis of the data indicates that an assumed split of 45% clay, 50% silt and 5% sand is a reasonable representation of the overall composition of the seabed within Orokolo Bay. A dry density of 1,800 kg/m³ was assumed to convert the dredging volumes into mass of material.

3.2.2 Caution Bay

Based on the mapped alignment and assumed dimensions of the trench to be excavated, the total volume of material to be dredged along the two alternative alignments within Caution Bay (from the 0 m LAT to the -15 m LAT contour) is approximately 41,000 m³ and 21,000 m³ for the northern and southern alignment options, respectively. Assuming a cutter suction dredger achieves a production rate of 1,250 m³/h, operating for 70% of the time, the expected duration of the dredging campaign is 2.0 days and 1.0 days for the northern and southern alignment, respectively. Based on similar assumptions adopted for Orokolo Bay, the assumed rate of loss of material to the water column was 10%, with the remaining 90% of material deposited on to the seabed but subject to resuspension by water current and wave-induced processes.

The particle size distributions of sediment samples collected in Caution Bay are presented in Part 9 of Volume 2. Analysis of the data indicates that an assumed split of 25% clay, 25% silt 45% sand and 5% gravel is a reasonable representation of the overall composition of the seabed within Caution Bay. A dry density of 1,800 kg/m³ was assumed to convert the dredging volumes into mass of material.

4 Modeling Results

The modeled increases in suspended sediment levels due to trenching activities were statistically analyzed over the duration of each modeled trenching campaign. Spatial maps of the depth-averaged 50th and 95th percentiles of the increase in total suspended sediment (TSS) concentrations and the net dredging-related sediment deposition were produced and are presented herein. The 50th percentile (i.e., median) occurs 50% of the time and is therefore considered to represent typical conditions. The 95th percentile (i.e., concentration that is exceeded only 5% of the time) is considered to represent a short-term peak concentration, above background levels.

4.1 Orokolo Bay – Northwest Monsoon Season

The 50th and 95th percentiles of the increase in TSS concentrations during the 4.75 days of the dredging operation are shown in Figure 4-1.

The 50th percentile depth-averaged TSS concentration generated by trenching is up to approximately 5 mg/L. Within approximately 4 km to the east of the pipeline alignment, the median dredging-related TSS concentration reduces to less than 2 mg/L.

The 95th percentile depth-averaged TSS concentration generated by trenching is up to less than 100 mg/L in the immediate vicinity (within 500 m) of the dredging operation. Within approximately 5 km either side of the pipeline alignment, the short-term peak increase in TSS concentration is less than 2 mg/L.

The final net deposition of sediment due to the trenching activity during the northwest monsoon season is shown in Figure 4-3 (left panel). The sediment deposition impacts (above 200 mg/cm²) are limited spatially to the immediate vicinity (within 500 m) of the dredging activity.


4.2 Orokolo Bay – Southeast Trade Winds Season

The 50th and 95th percentiles of the increase in TSS concentrations during the 4.75 days of the dredging operation are shown in Figure 4-2.



The 50th percentile depth-averaged TSS concentration generated by trenching is up to approximately 2 mg/L. The dredging-related TSS concentration increase up to 2 mg/L is limited to a distance of 10 km of the dredging operation, towards the west.

The 95th percentile depth-averaged TSS concentration generated by trenching is up to less than 100 mg/L in the immediate vicinity (within 500 m) of the dredging operation. Advection of the dredging-related plume is mostly in the westerly direction. Within approximately 6 km to the west of the pipeline alignment, the short-term peak increase in dredging-related TSS concentration is less than 2 mg/L.

The final net deposition of sediment due to the trenching activity during the southeast trade winds season is shown in Figure 4-3 (right panel). The sediment deposition impacts (above 200 mg/cm²) are limited spatially to the immediate vicinity (within 500 m) of the dredging activity.

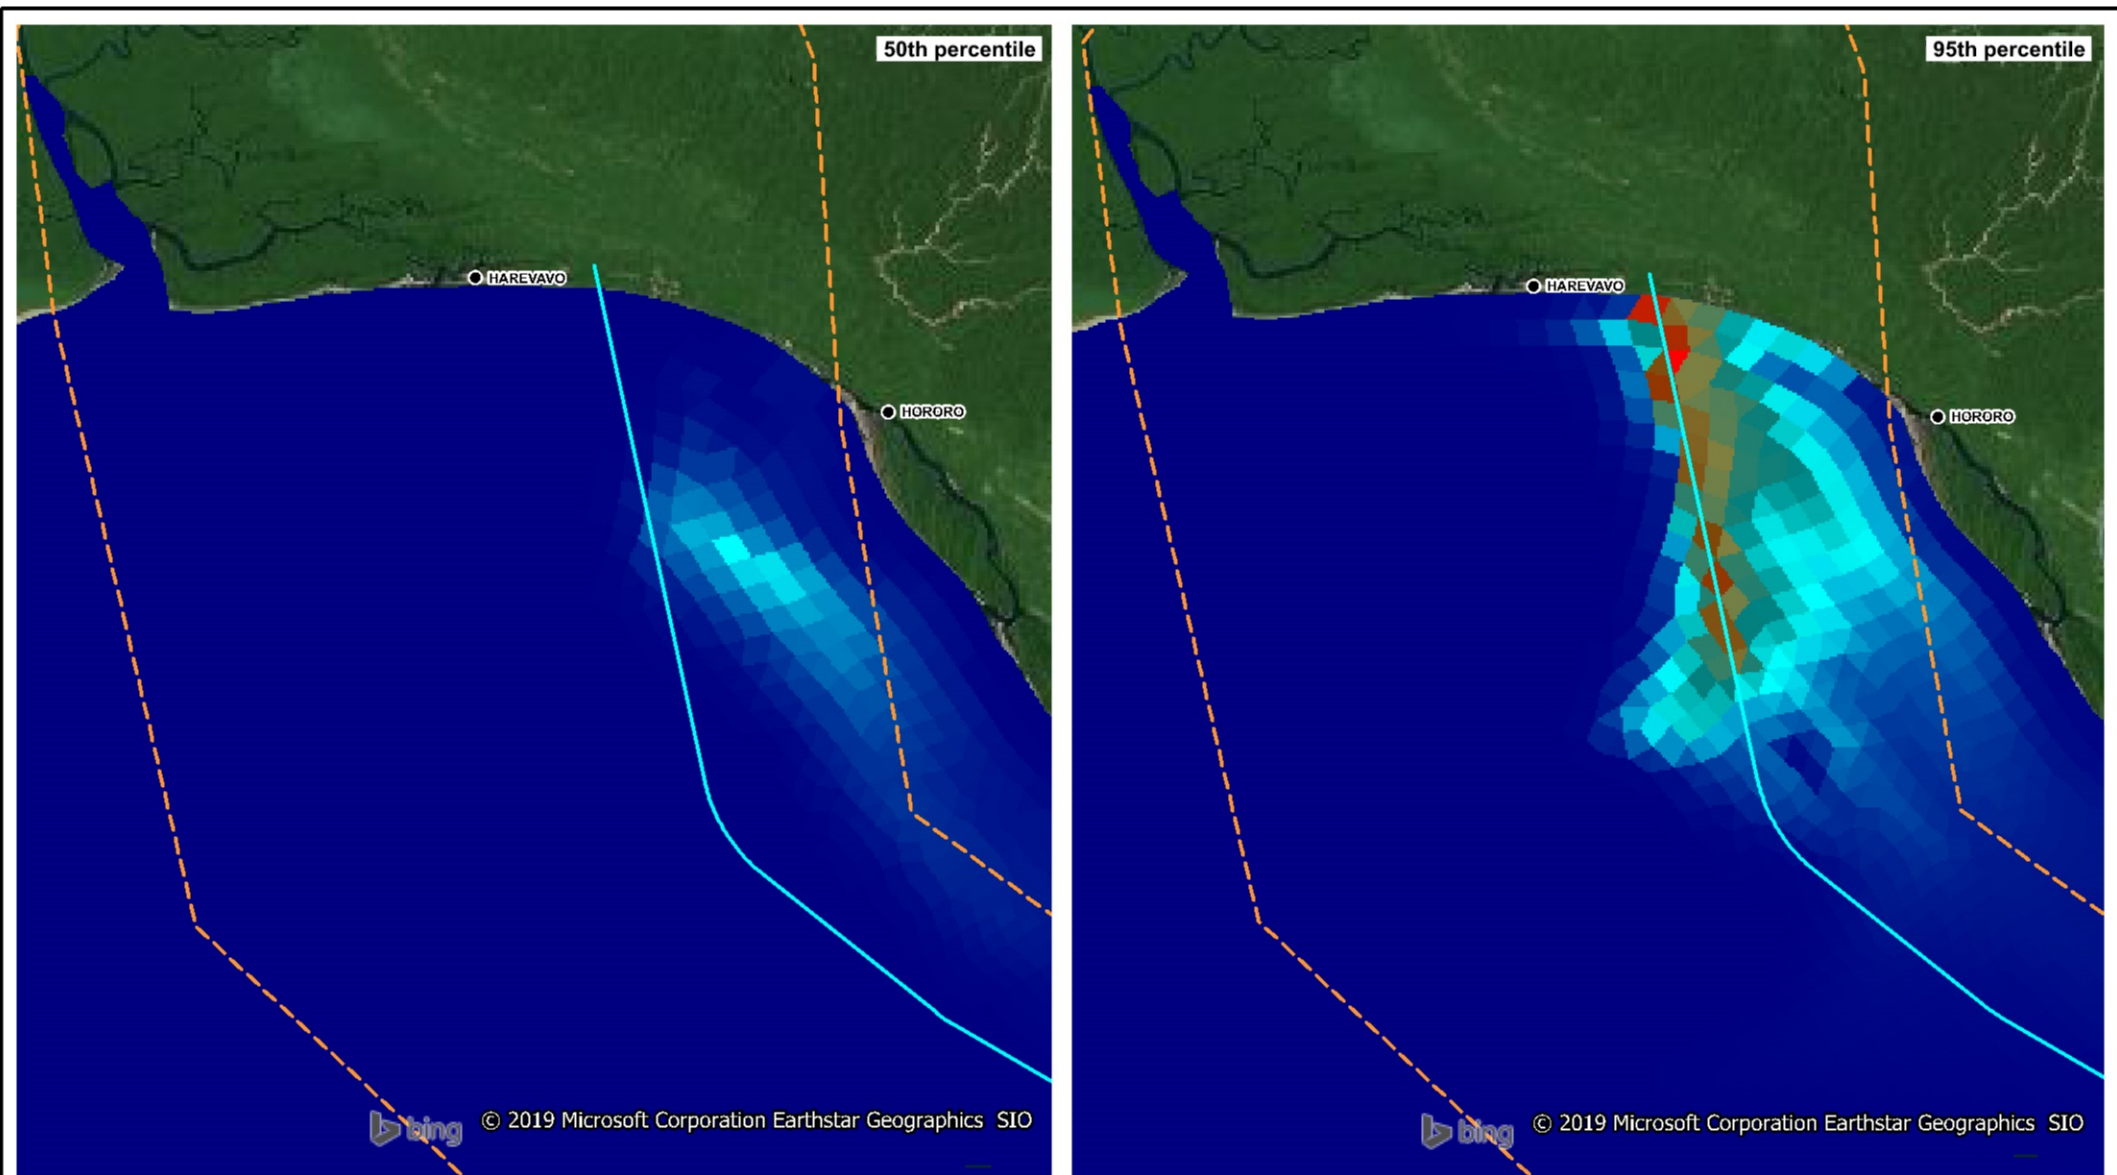

LEGEND ● Town/Village — Papua LNG Pipeline Routes - - - Pipeline Corridor 0 5 10 25 50 80 mg/L	Title: Depth-averaged TSS Increases in Orokolo Bay During Northwest Monsoon Season BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map. Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_J\DRG\ECO_084_190418_Orokolo_95_TSS_Monsoon.wor	Figure: 4-1 Rev: A  www.bmt.org
---	--	---

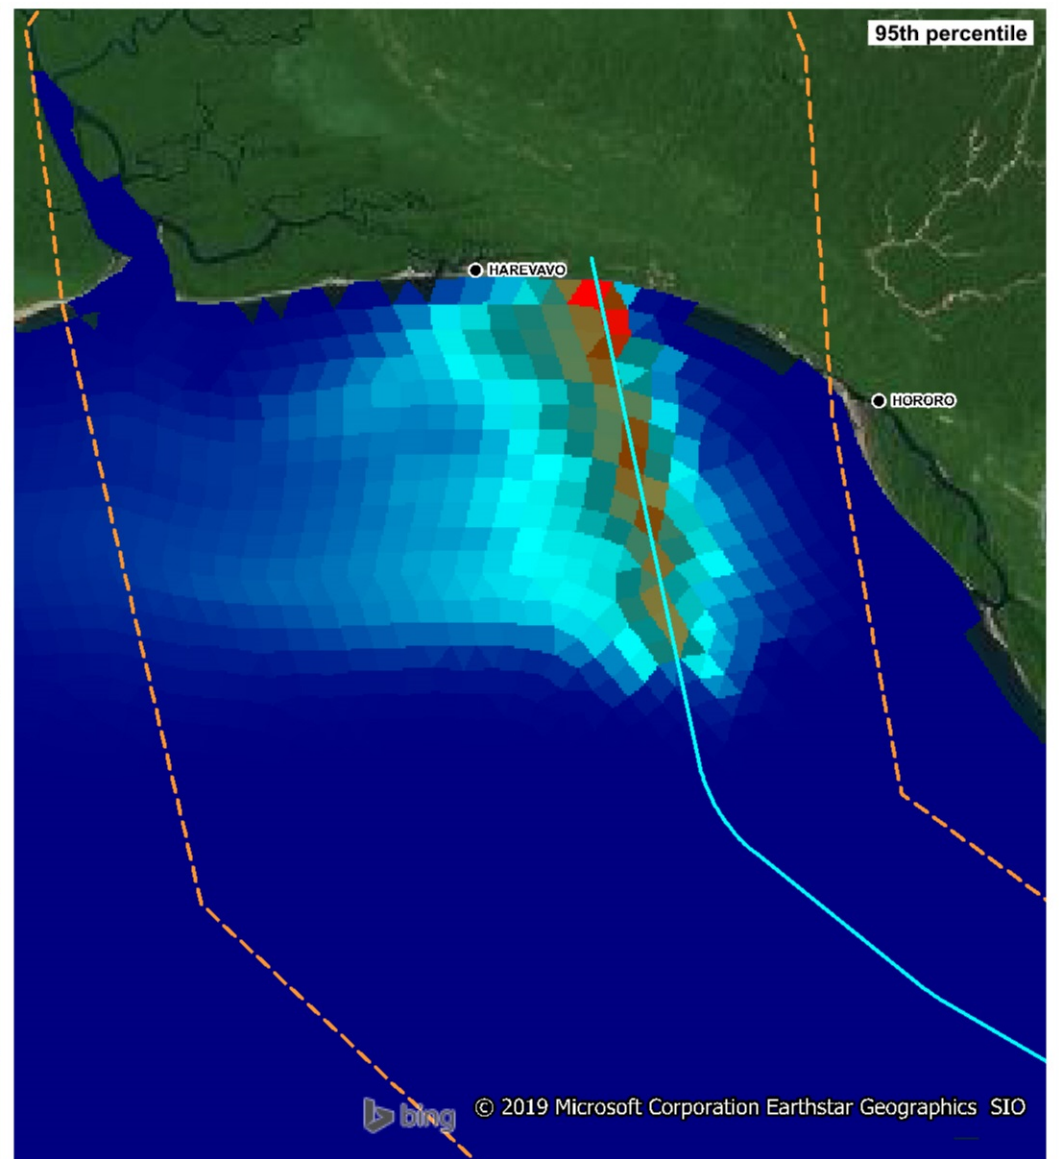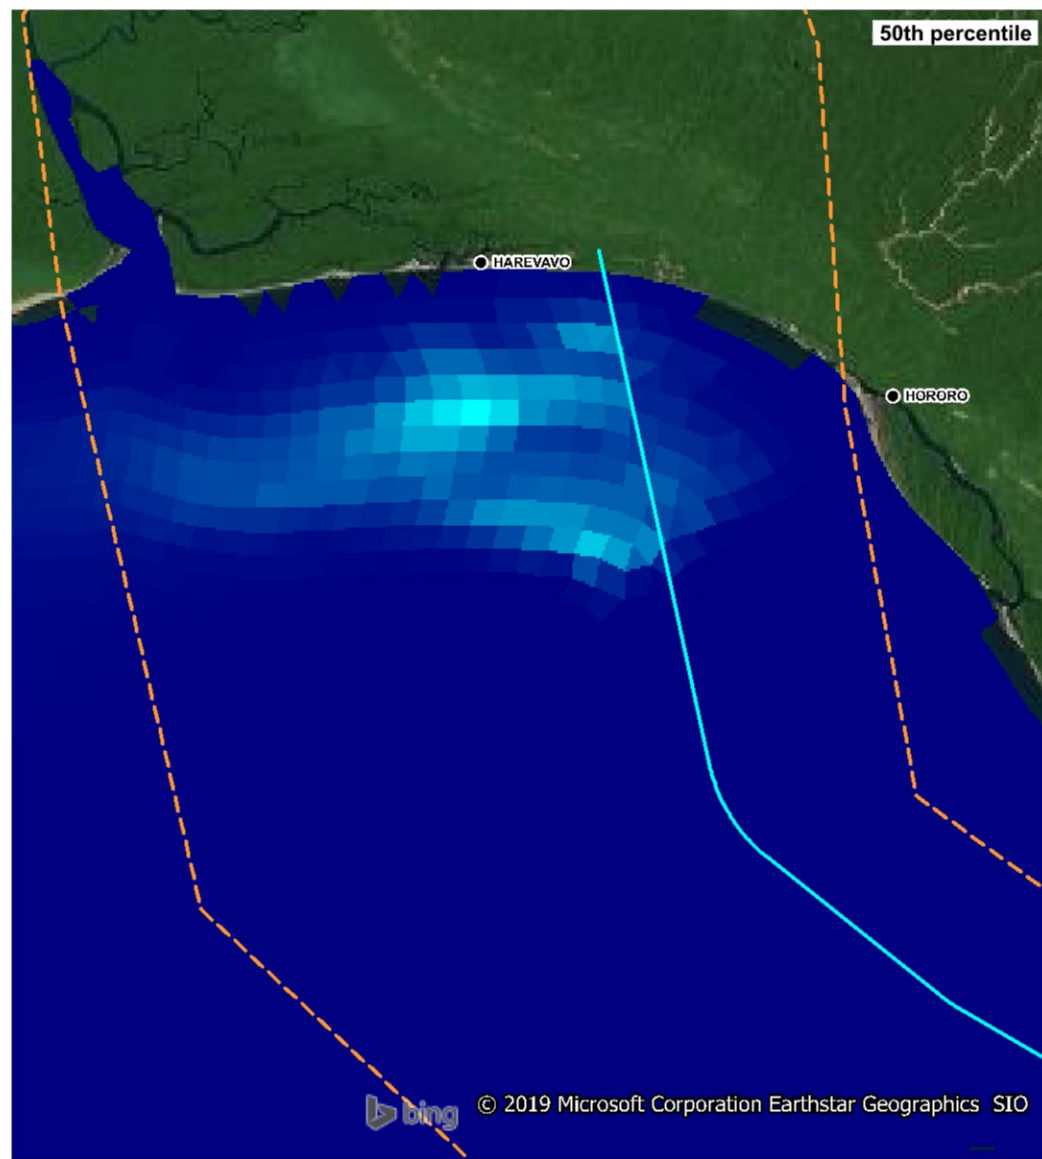

LEGEND

- Town/Village
- Papua LNG Pipeline Routes
- - - Pipeline Corridor

0 5 10 25 50 80
mg/L

Title:

Depth-averaged TSS Increase in Orokolo Bay During Southeast Trade Winds Season

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.




0km 4 8
Approx. Scale

Figure:
4-2

Rev:
A



Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_JV\DRG\ECO_084b_190418_Orokolo_95_TSS_Dry.wor

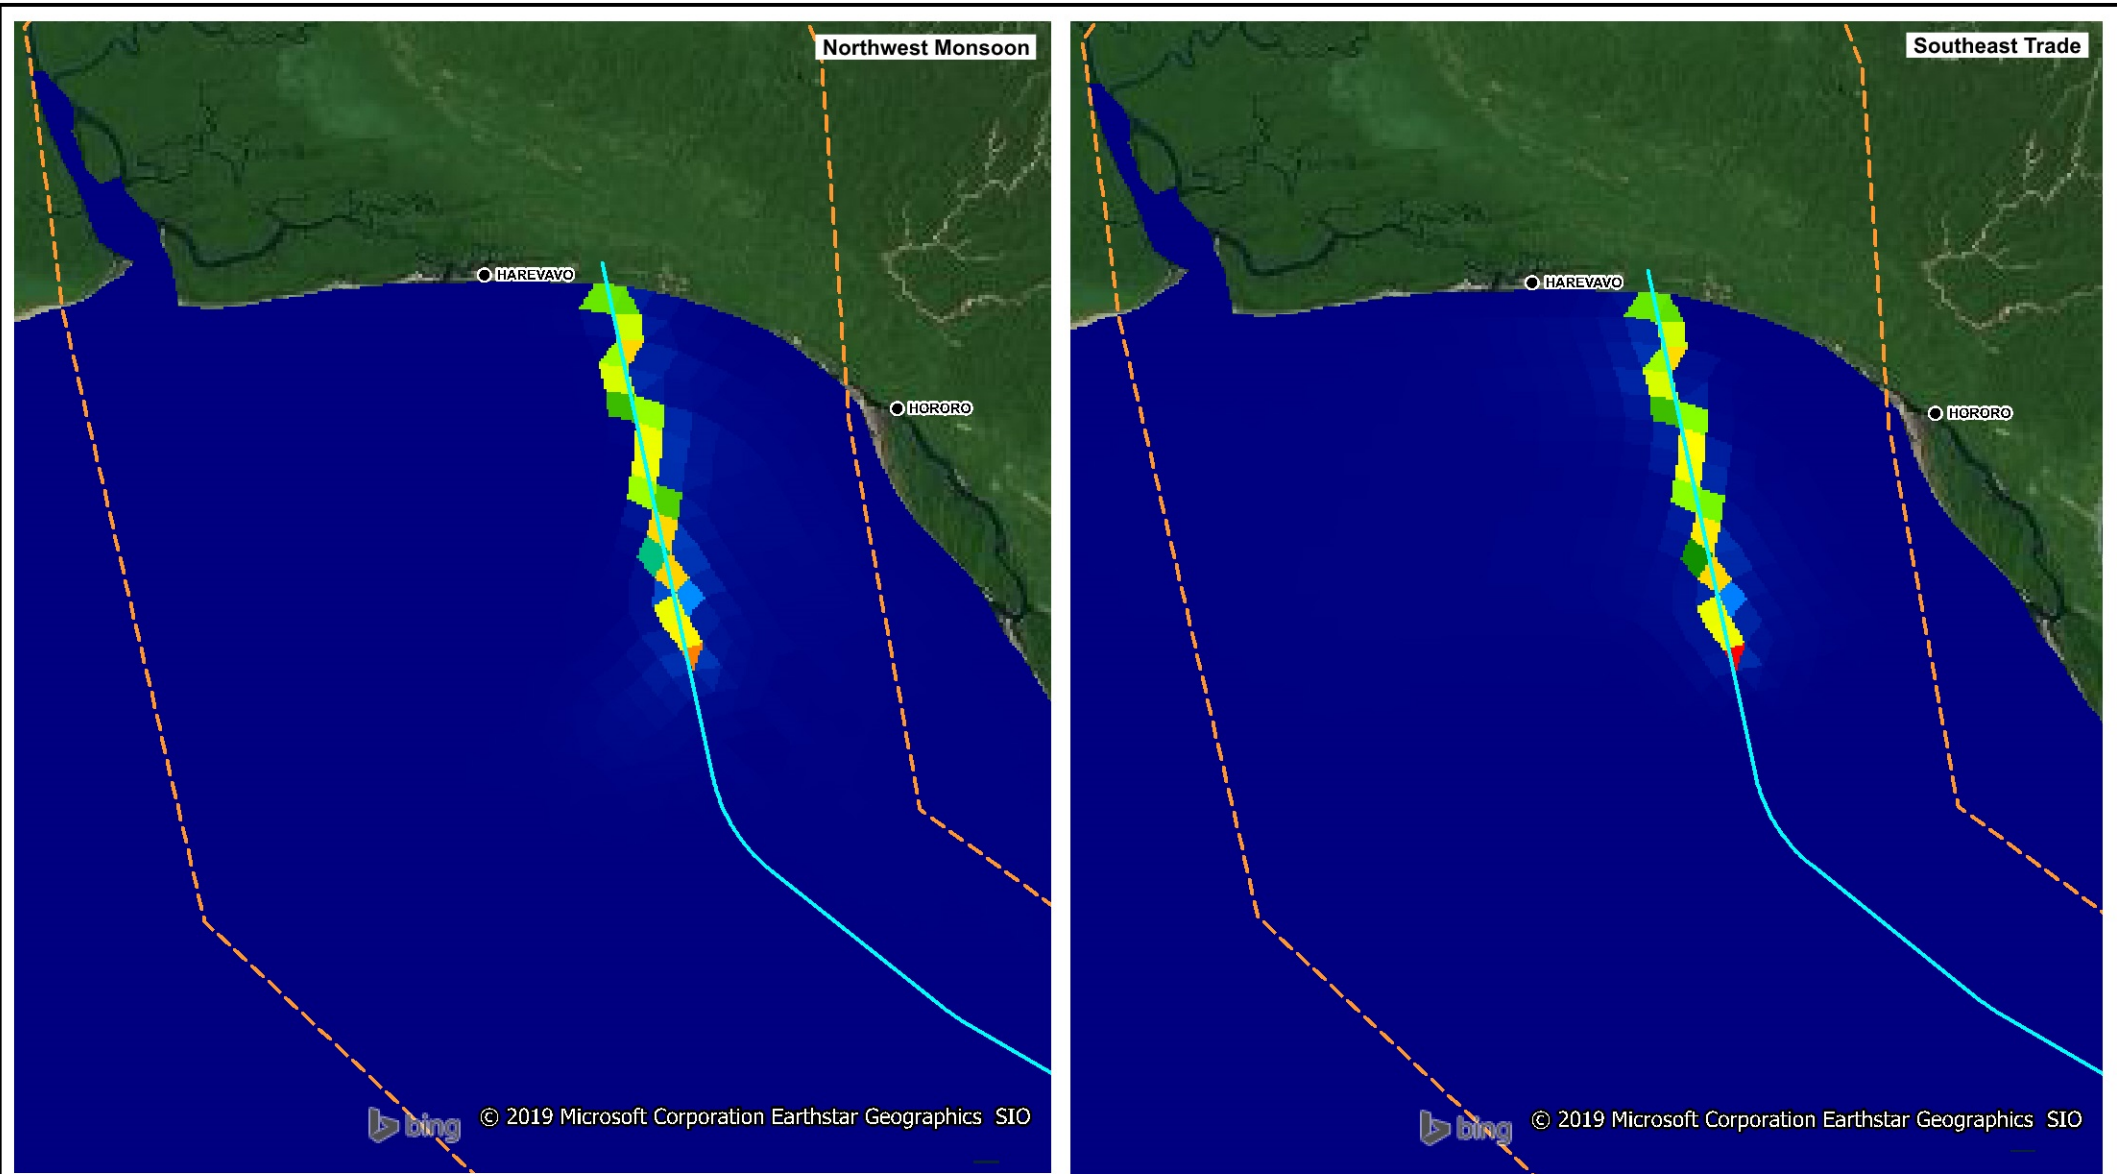

LEGEND	Title:	Figure:	Rev:
● Town/Village — Papua LNG Pipeline Routes - - - Pipeline Corridor 0 1,000 2,000 4,000 6,500 15,000 31,000 mg/cm²	Final Net Deposition of Sediment Mobilized from Trenching in Orokolo Bay BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map. Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_JV\DRG\ECO_084c_190418_Orokolo_DepRate.wor	4-3	A
	N 0km 4 8 Approx. Scale	 BMT www.bmt.org	

4.3 Caution Bay (Northern Alignment) – Northwest Monsoon Season

The 50th and 95th percentiles of the increase in TSS concentrations during the 2.0 days of the dredging operation are shown in Figure 4-4.

The 50th percentile depth-averaged TSS concentration generated by trenching is up to approximately 5 mg/L. This low concentration plume extends south to Haidana Island due to the prevailing wind direction and resuspension associated with the hydrodynamic climate.

The 95th percentile depth-averaged TSS concentration generated by trenching is up to less than 100 mg/L in the immediate vicinity of the dredging operation. Advection of the dredging-related plume is mostly in the southeast direction. Within approximately 10 km either side of the pipeline alignment, the dredging-related increase of short-term peak TSS reduces to less than 2 mg/L.

The final net deposition of sediment due to the trenching activity is shown in Figure 4-6 (left panel). The sediment deposition impacts (above 200 mg/cm²) are limited spatially to the immediate vicinity (within 500 m) of the dredging activity.


4.4 Caution Bay (Northern Alignment) – Southeast Trade Winds Season

The 50th and 95th percentiles of the increase in TSS concentrations during the 2.0 days of the dredging operation are shown in Figure 4-5.


The 50th percentile depth-averaged TSS concentration generated by trenching is up to approximately 5 mg/L. The dredging-related TSS increase up to 2 mg/L is limited to within 2 km of the dredging operation, on either side.

The 95th percentile depth-averaged TSS concentration generated by trenching is up to less than 100 mg/L in the immediate vicinity of the dredging operation. Advection of the dredging-related plume is mostly in the northerly direction. Within approximately 6 km to the north of the pipeline alignment, the dredging-related increase of short-term peak TSS reduces to less than 2 mg/L.

The final net deposition of sediment due to the trenching activity is shown in Figure 4-6 (right panel). The sediment deposition impacts (above 200 mg/cm²) are limited spatially to the immediate vicinity (within 500 m) of the dredging activity.

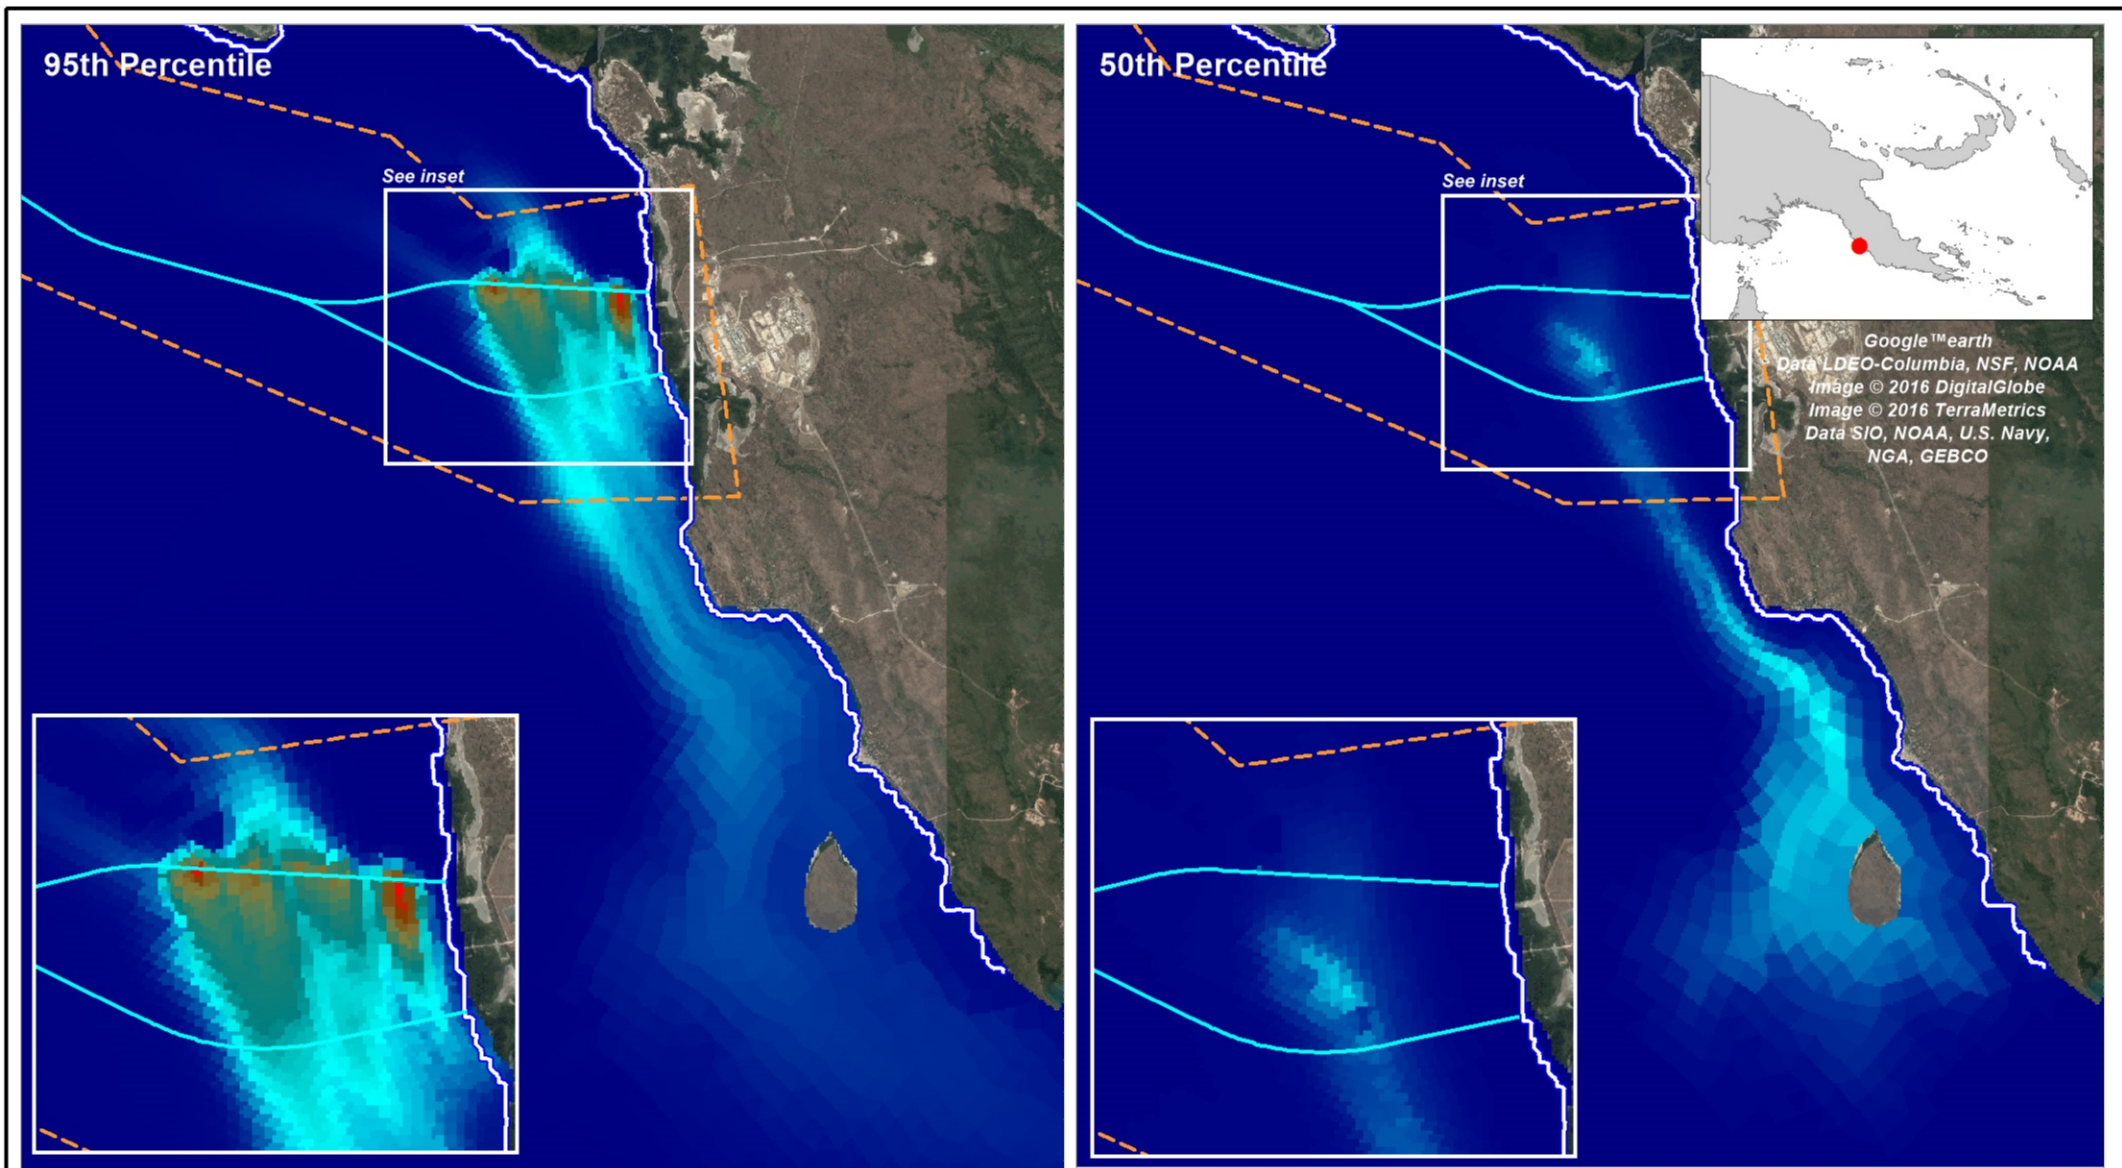

LEGEND

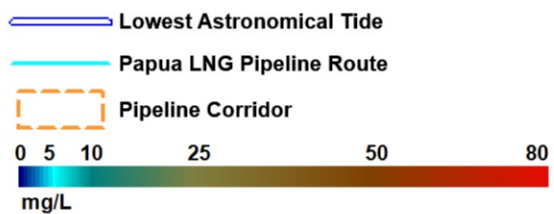

Title:

Depth-averaged TSS Increase in Caution Bay During Northwest Monsoon Season - Northern Alignment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.

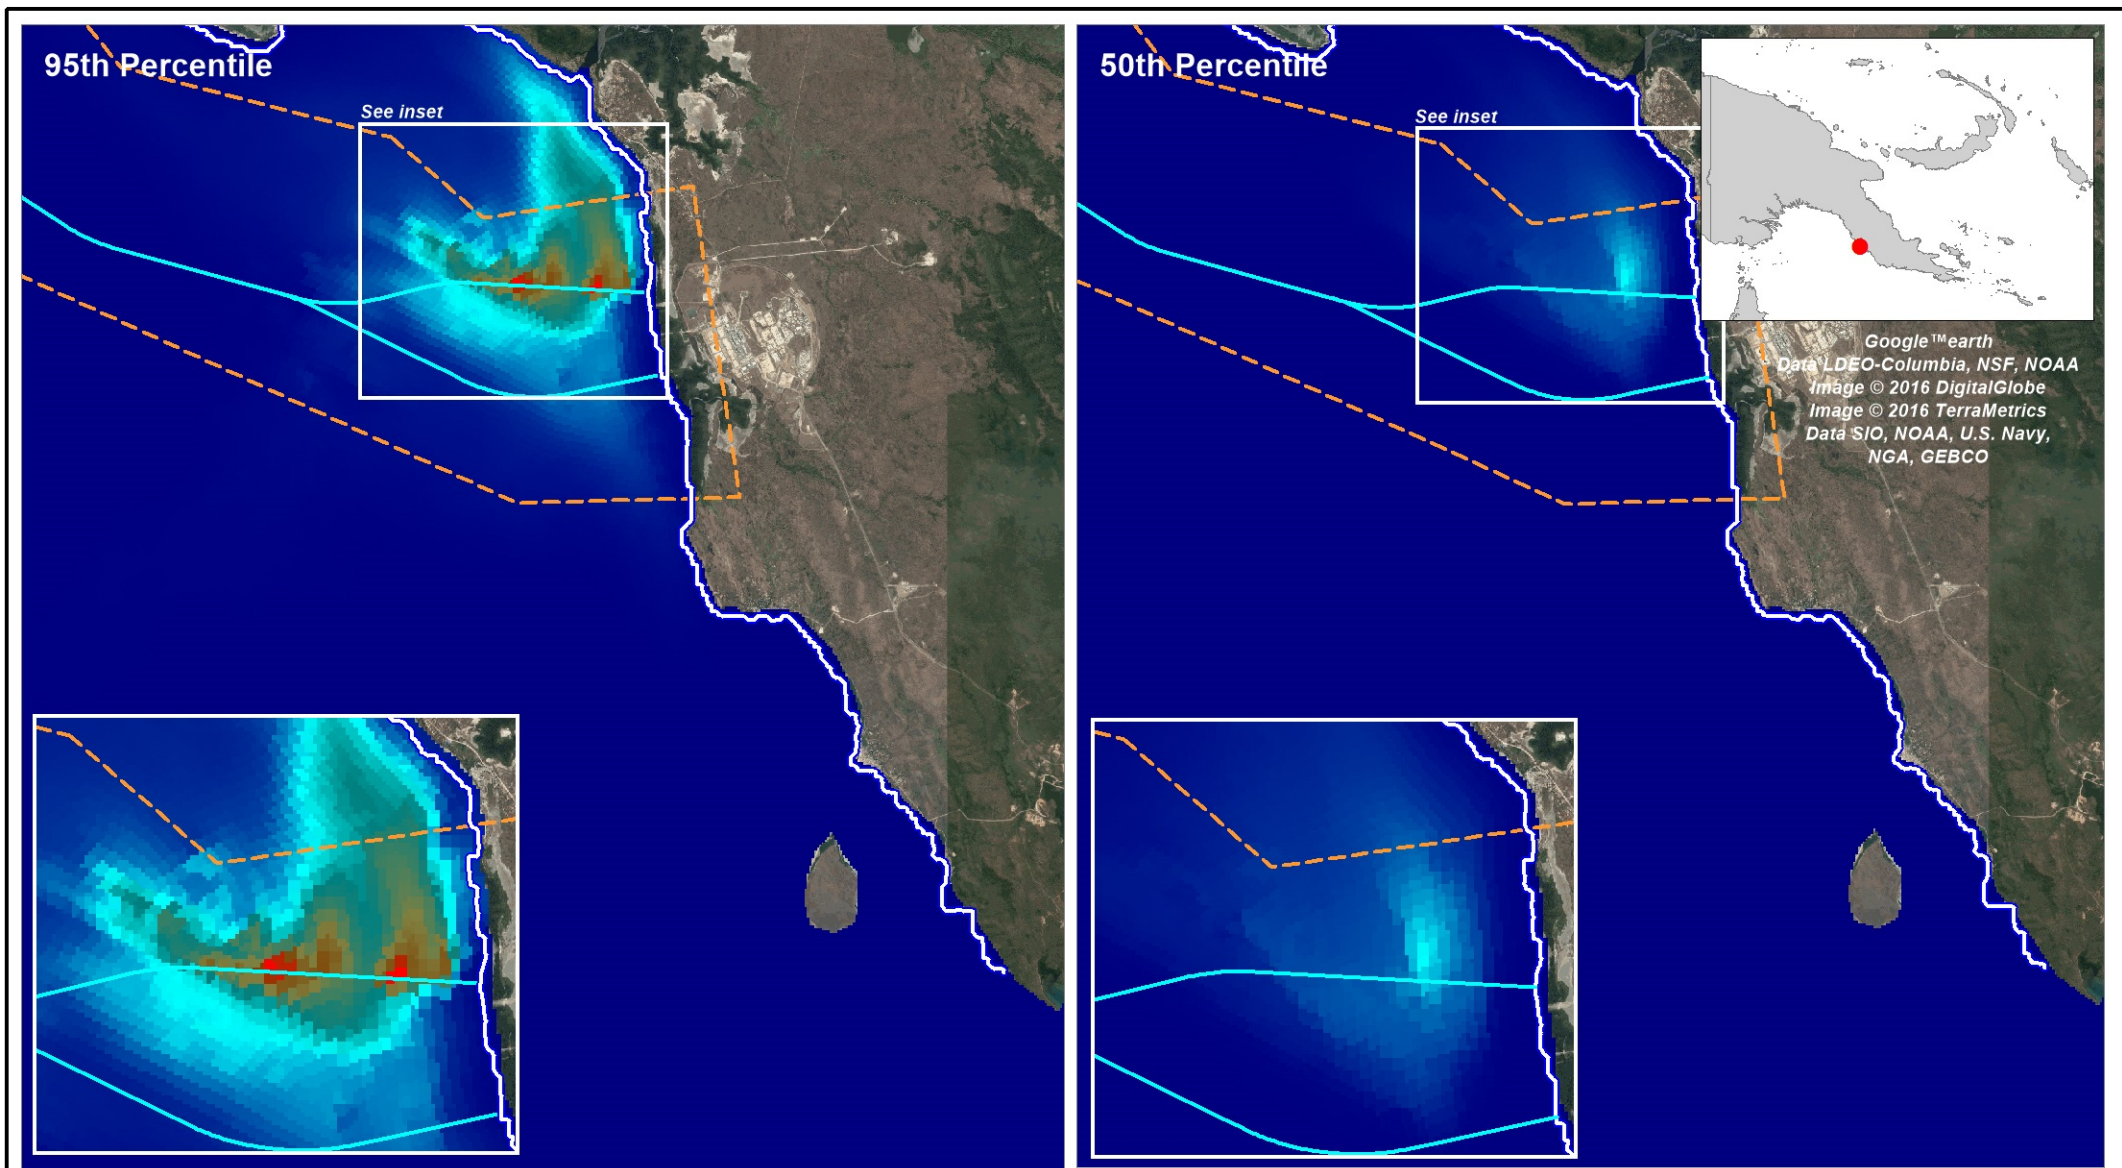


Figure:
4-4


Rev:
A



Filepath: I:\B21414_I_GML_Eik_Antelope_EIA_JV\DRG\ECO_086_190418_Caution_TSS_North_Wet.wor



LEGEND

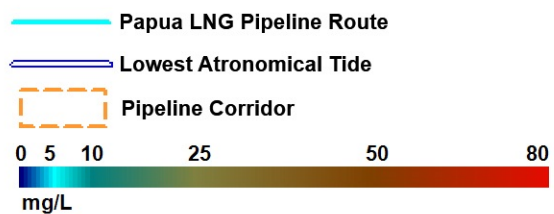

Title:

Depth-averaged TSS Increase in Caution Bay During Southeast Trade Winds Season - Northern Alignment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.





Figure:
4-5

Rev:
A



www.bmt.org

Filepath: I:\B21414_I_GML_Eik_Antelope_EIA_JV\DRG\ECO_086b_190418_Caution_TSS_North_Dry.wor

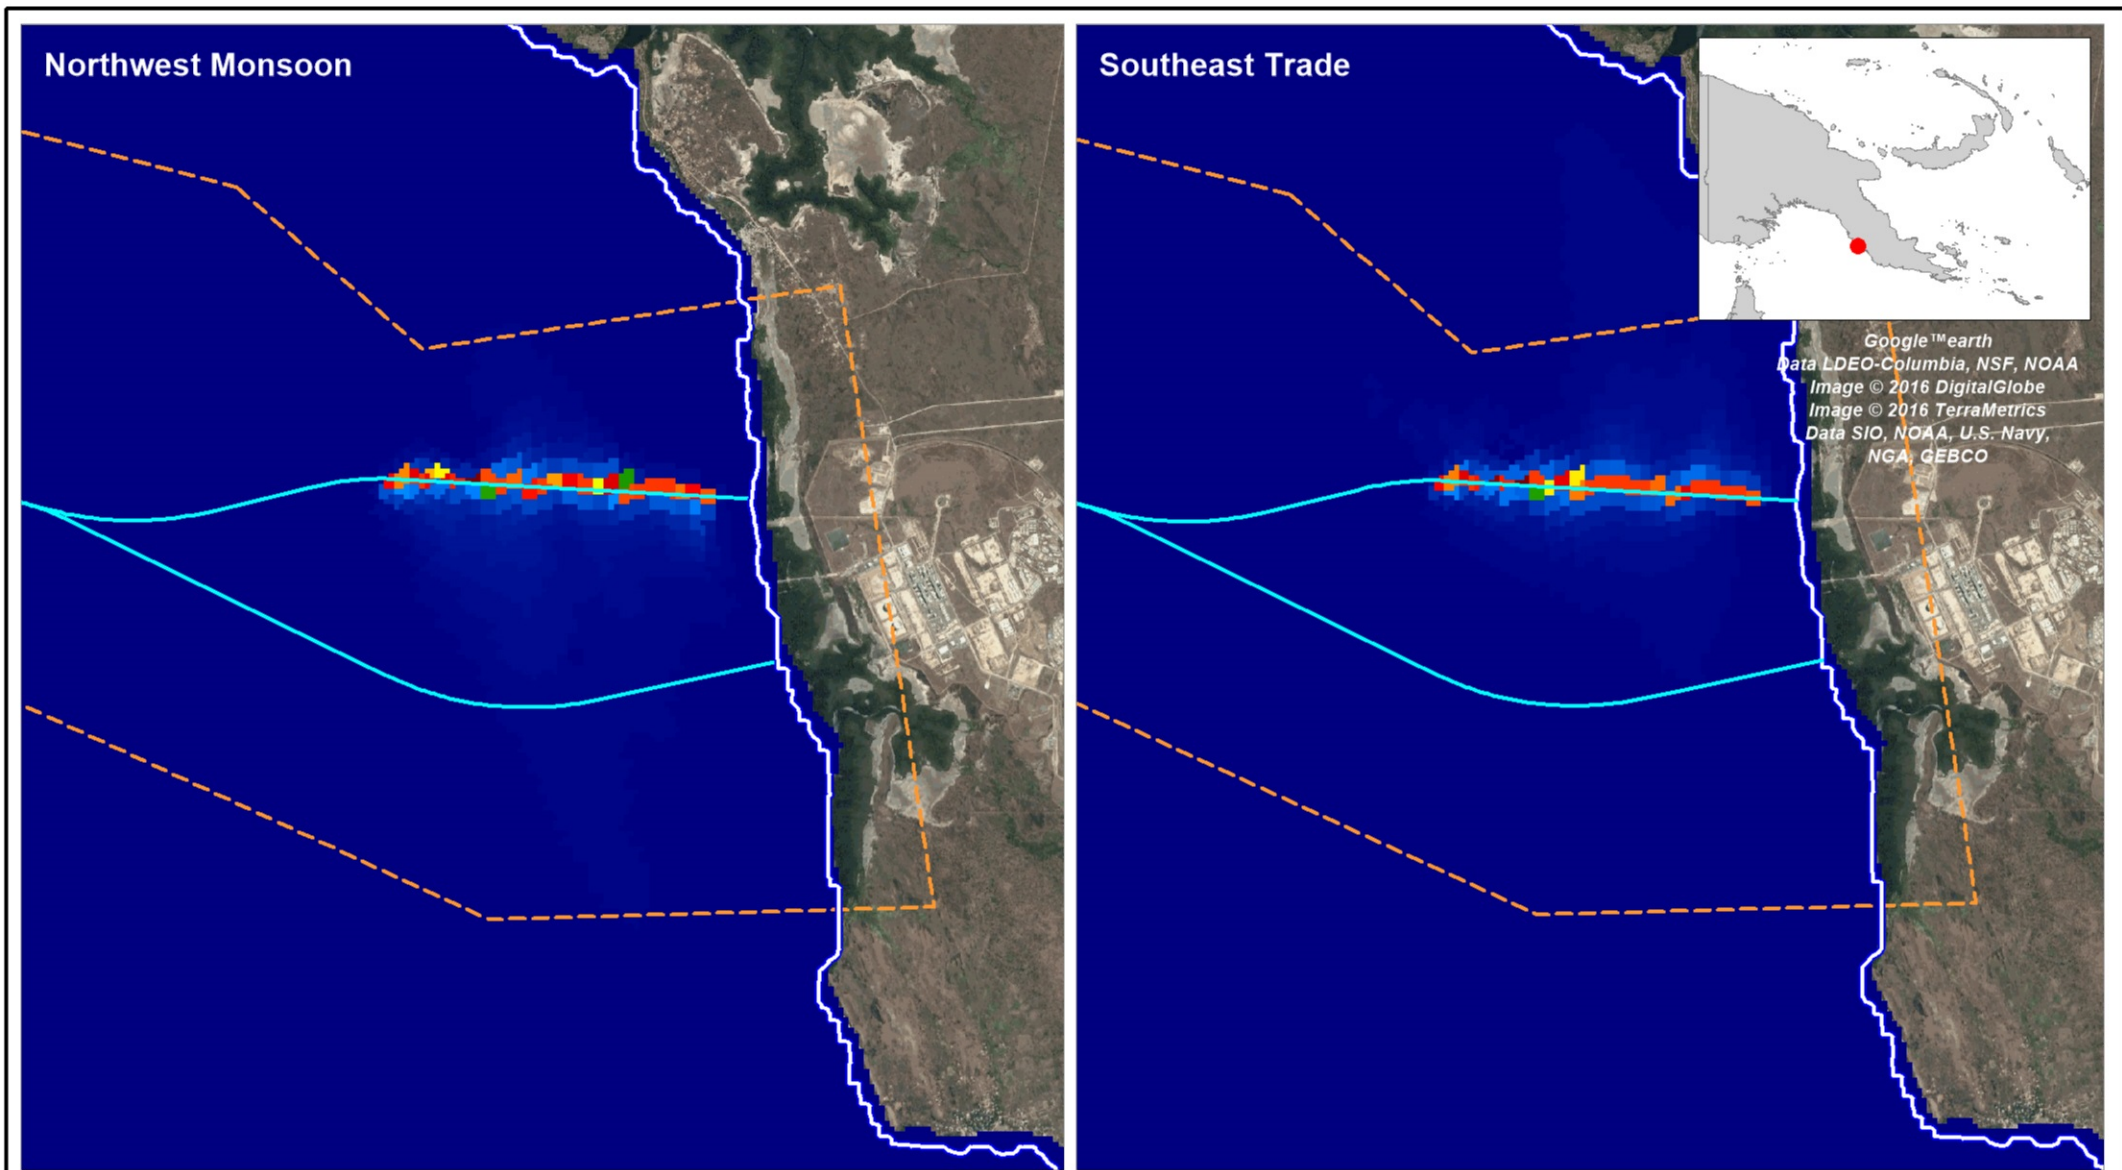

LEGEND

- Lowest Astronomical Tide
- Papua LNG Pipeline Route
- Pipeline Corridor



Title:

Final Net Deposition of Sediment Mobilized from Trenching of Cauton Bay - Northern Alignment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.



Figure:
4-6

Rev:
A



Filepath: I:\B21414_I_GML_Eik_Antelope_EIA_JV\DRG\ECO_086e_190418_Cauton_Deprate_North.wor

4.5 Caution Bay (Southern Alignment) – Northwest Monsoon Season

The 50th and 95th percentiles of the increase in TSS concentrations during the 1.0 days of the dredging operation are shown in Figure 4-7.

The 50th percentile depth-averaged TSS concentration generated by trenching is less than 5 mg/L.

The 95th percentile depth-averaged TSS concentration generated by trenching is up to less than 100 mg/L in the immediate vicinity of the dredging operation. Advection of the dredging-related plume is mostly in the southeast direction. Within approximately 10 km to the southeast of the pipeline alignment, the dredging-related increase of short-term peak TSS reduces to less than 2 mg/L.

The final net deposition of sediment due to the trenching activity is shown in Figure 4-9 (left panel). The sediment deposition impacts (above 200 mg/cm²) are limited spatially to the immediate vicinity (within 0.5 km) of the dredging activity.


4.6 Caution Bay (Southern Alignment) – Southeast Trade Winds Season

The 50th and 95th percentiles of the increase in TSS concentrations during the 1.0 days of the dredging operation are shown in Figure 4-8.

The 50th percentile depth-averaged TSS concentration generated by trenching is less than 5 mg/L.

The 95th percentile depth-averaged TSS concentration generated by trenching is up to less than 100 mg/L in the immediate vicinity of the dredging operation. Advection of the dredging-related plume is mostly in the northerly direction. Within approximately 6 km to the north of the pipeline alignment, the dredging-related increase of short-term peak TSS reduces to less than 2 mg/L.

The final net deposition of sediment due to the trenching activity is shown in Figure 4-9 (right panel). The sediment deposition impacts (above 200 mg/cm²) are limited spatially to the immediate vicinity (within 0.5 km) of the dredging activity.

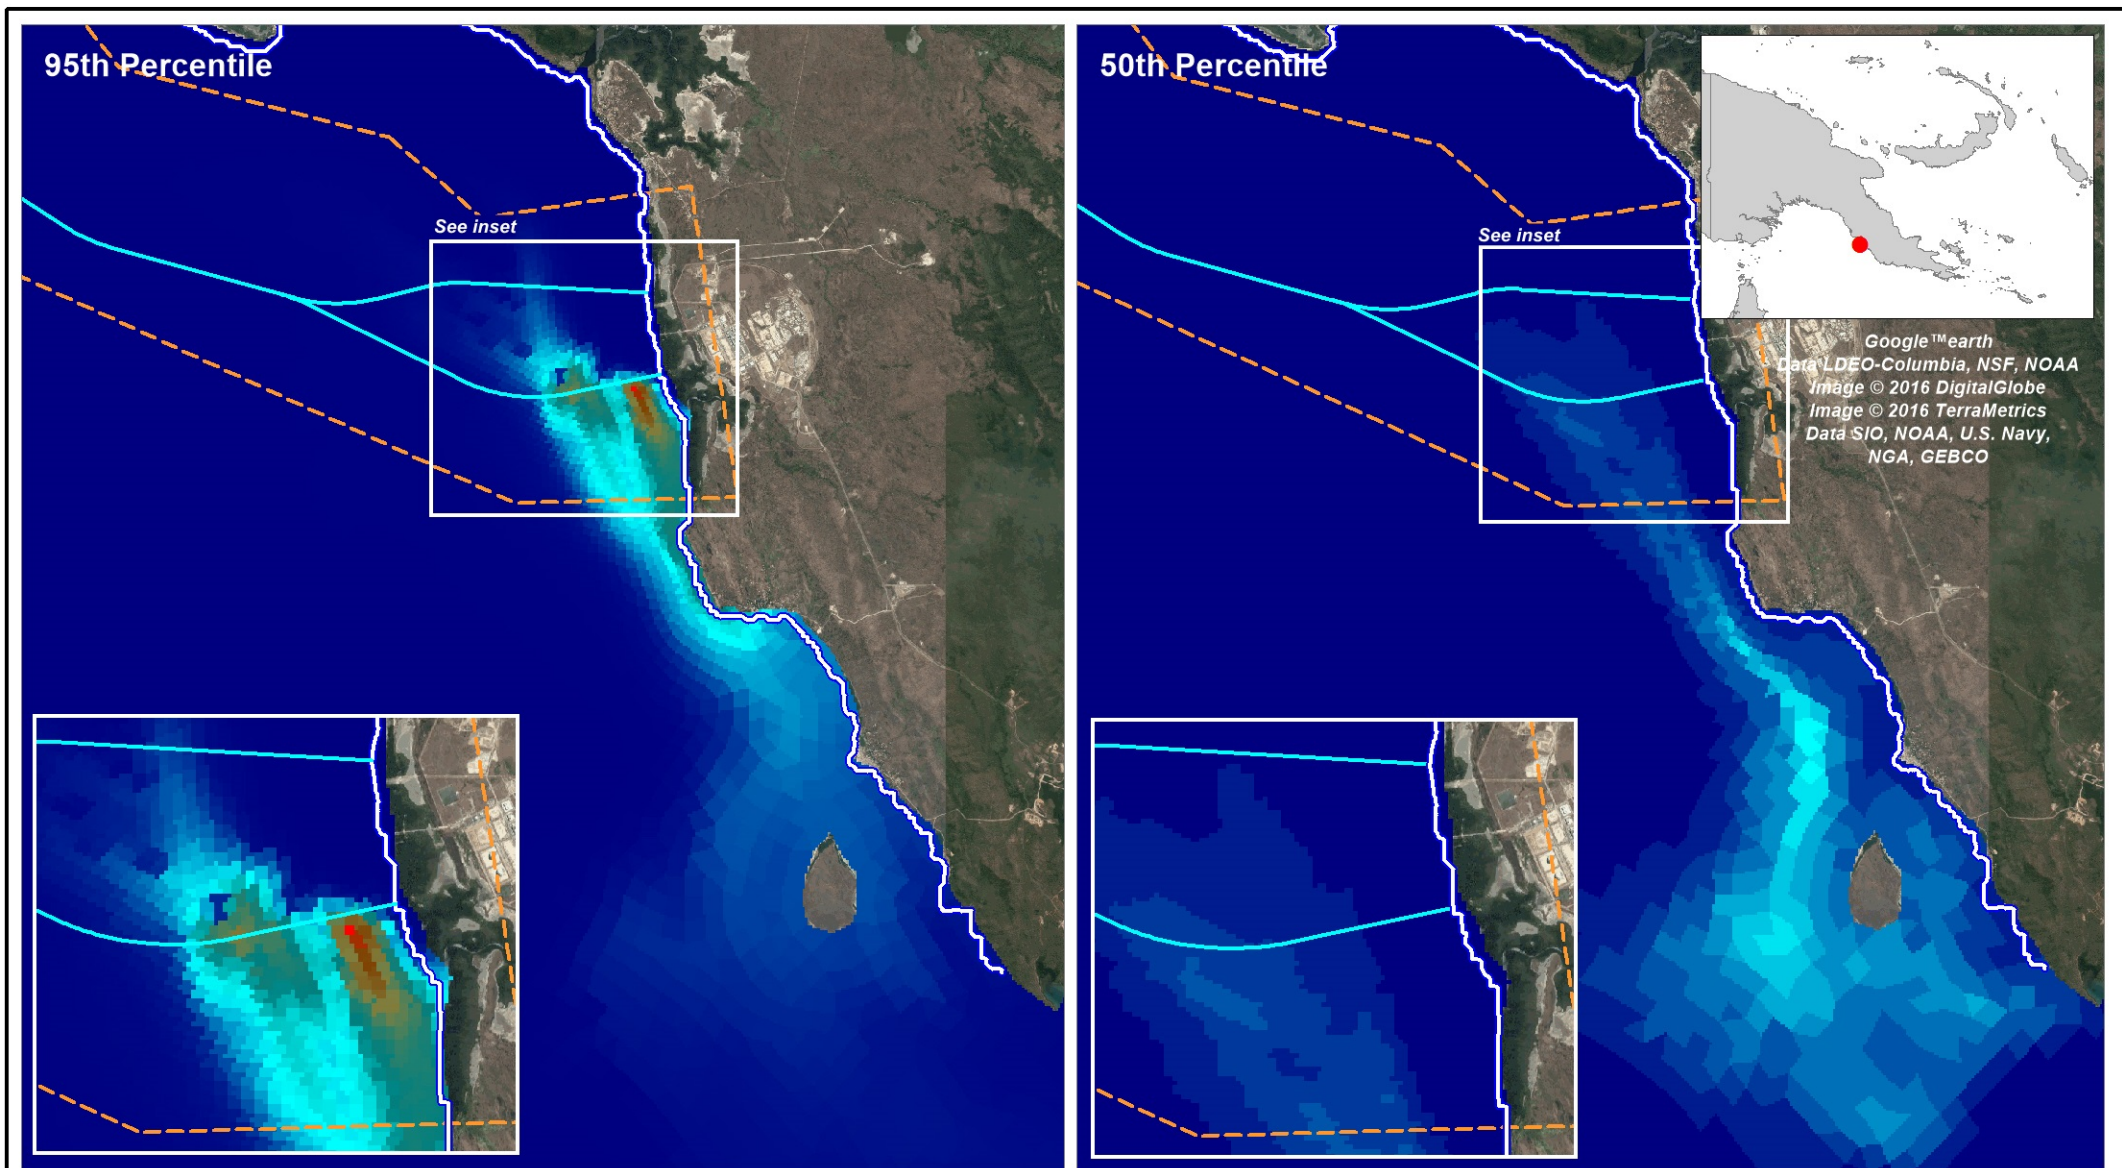

LEGEND

- Papua LNG Pipeline Routes
- Lowest Astronomical Tide
- Pipeline Corridor



Title:

Depth-averaged TSS Increase in Caution Bay During Northwest Monsoon Season - Southern Alignment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.





Figure:
4-7


Rev:
A



Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_JV\DRG\ECO_086c_190418_Caution_TSS_South_Wet.wor

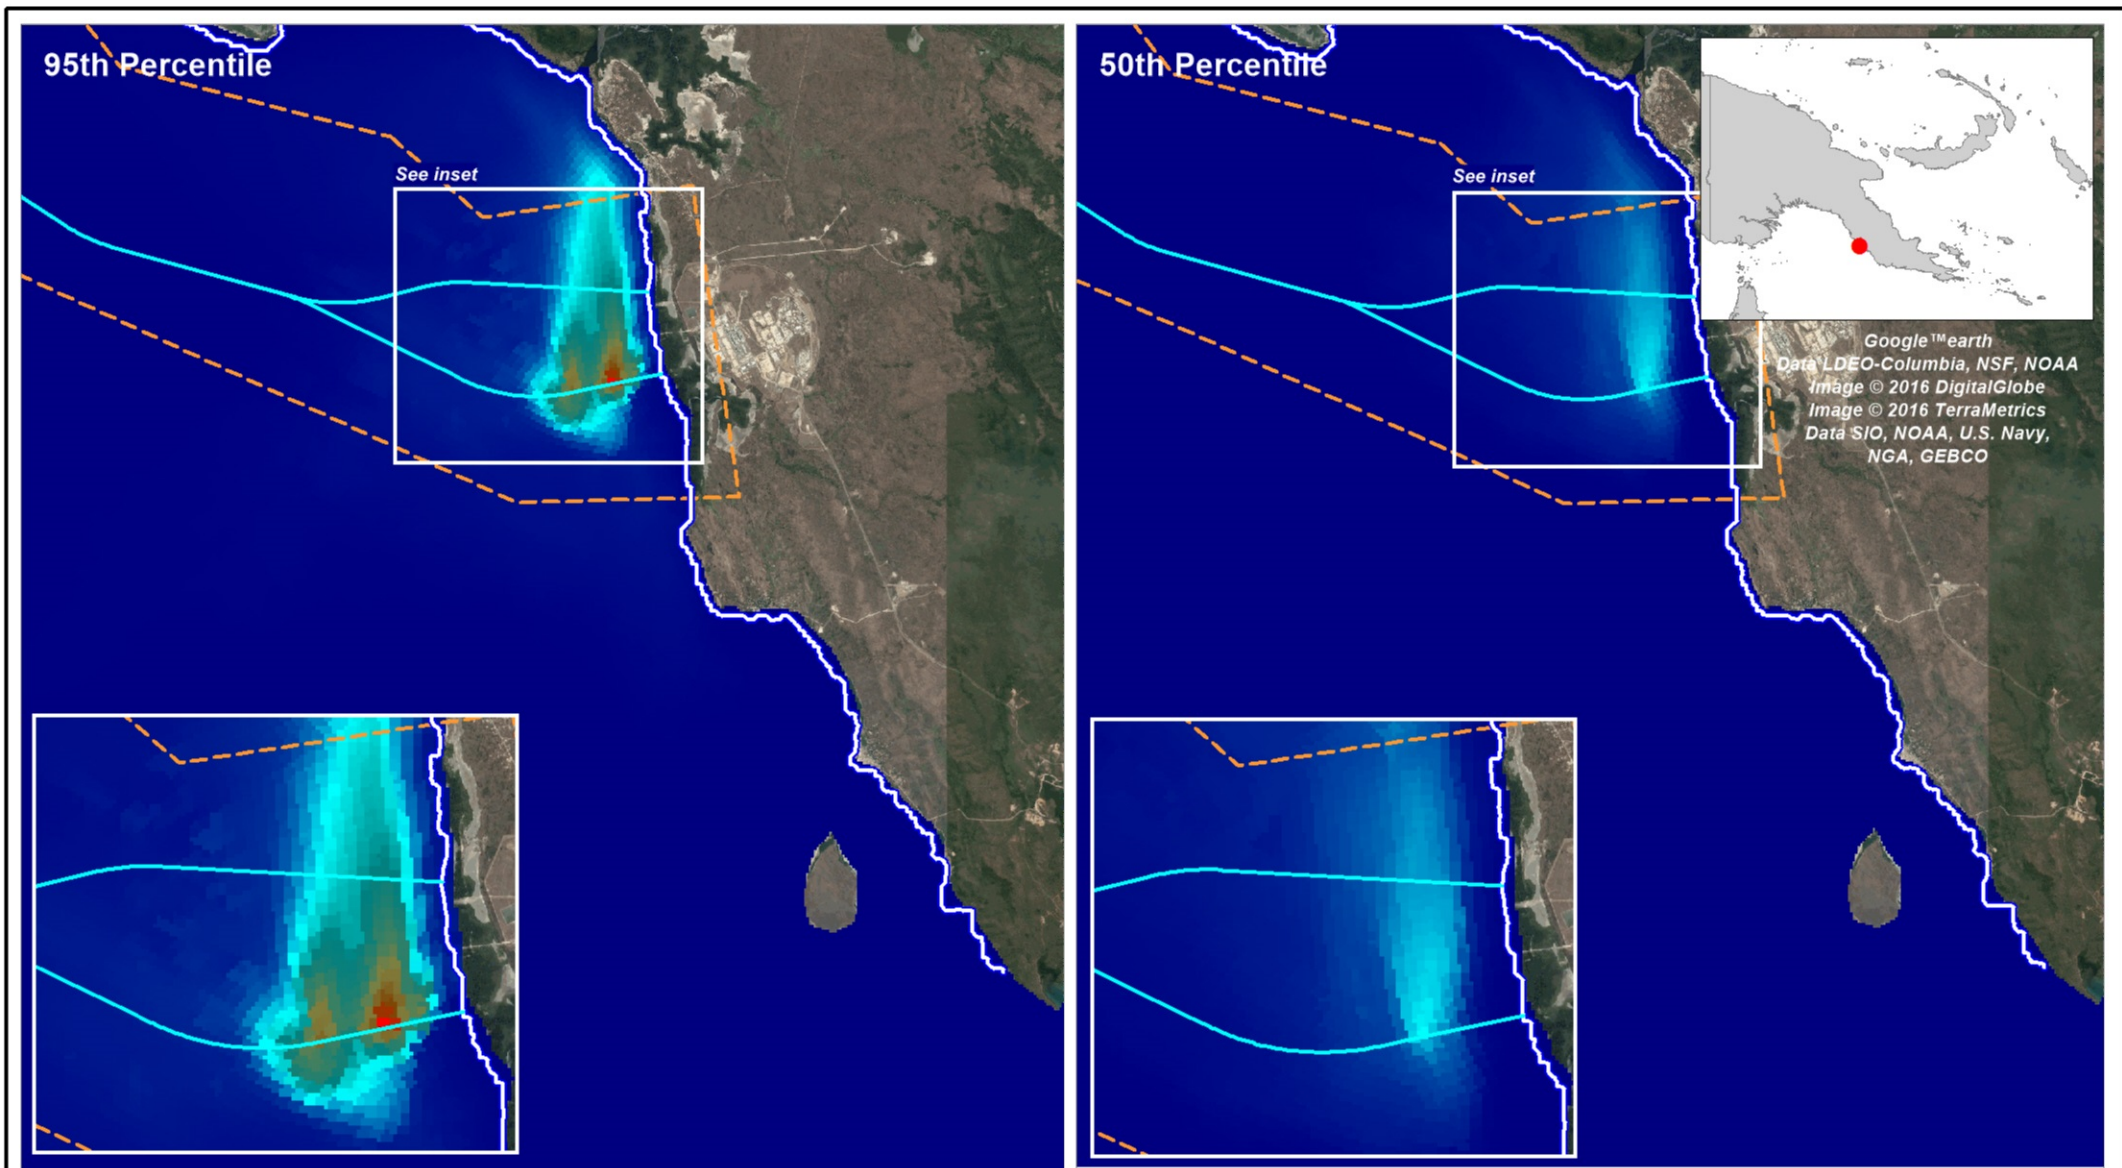

LEGEND

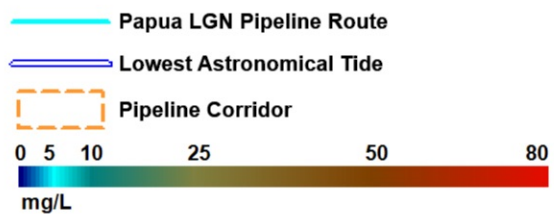

Title:

Depth-averaged TSS Increase in Caution Bay During Southeast Trade Winds Season - Southern Alignment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.





Figure:
4-8

Rev:
A




Filepath: I:\B21414_I_GML_Eik_Antelope_EIA_JV\DRG\ECO_086d_190418_Caution_TSS_South_Dry.wor

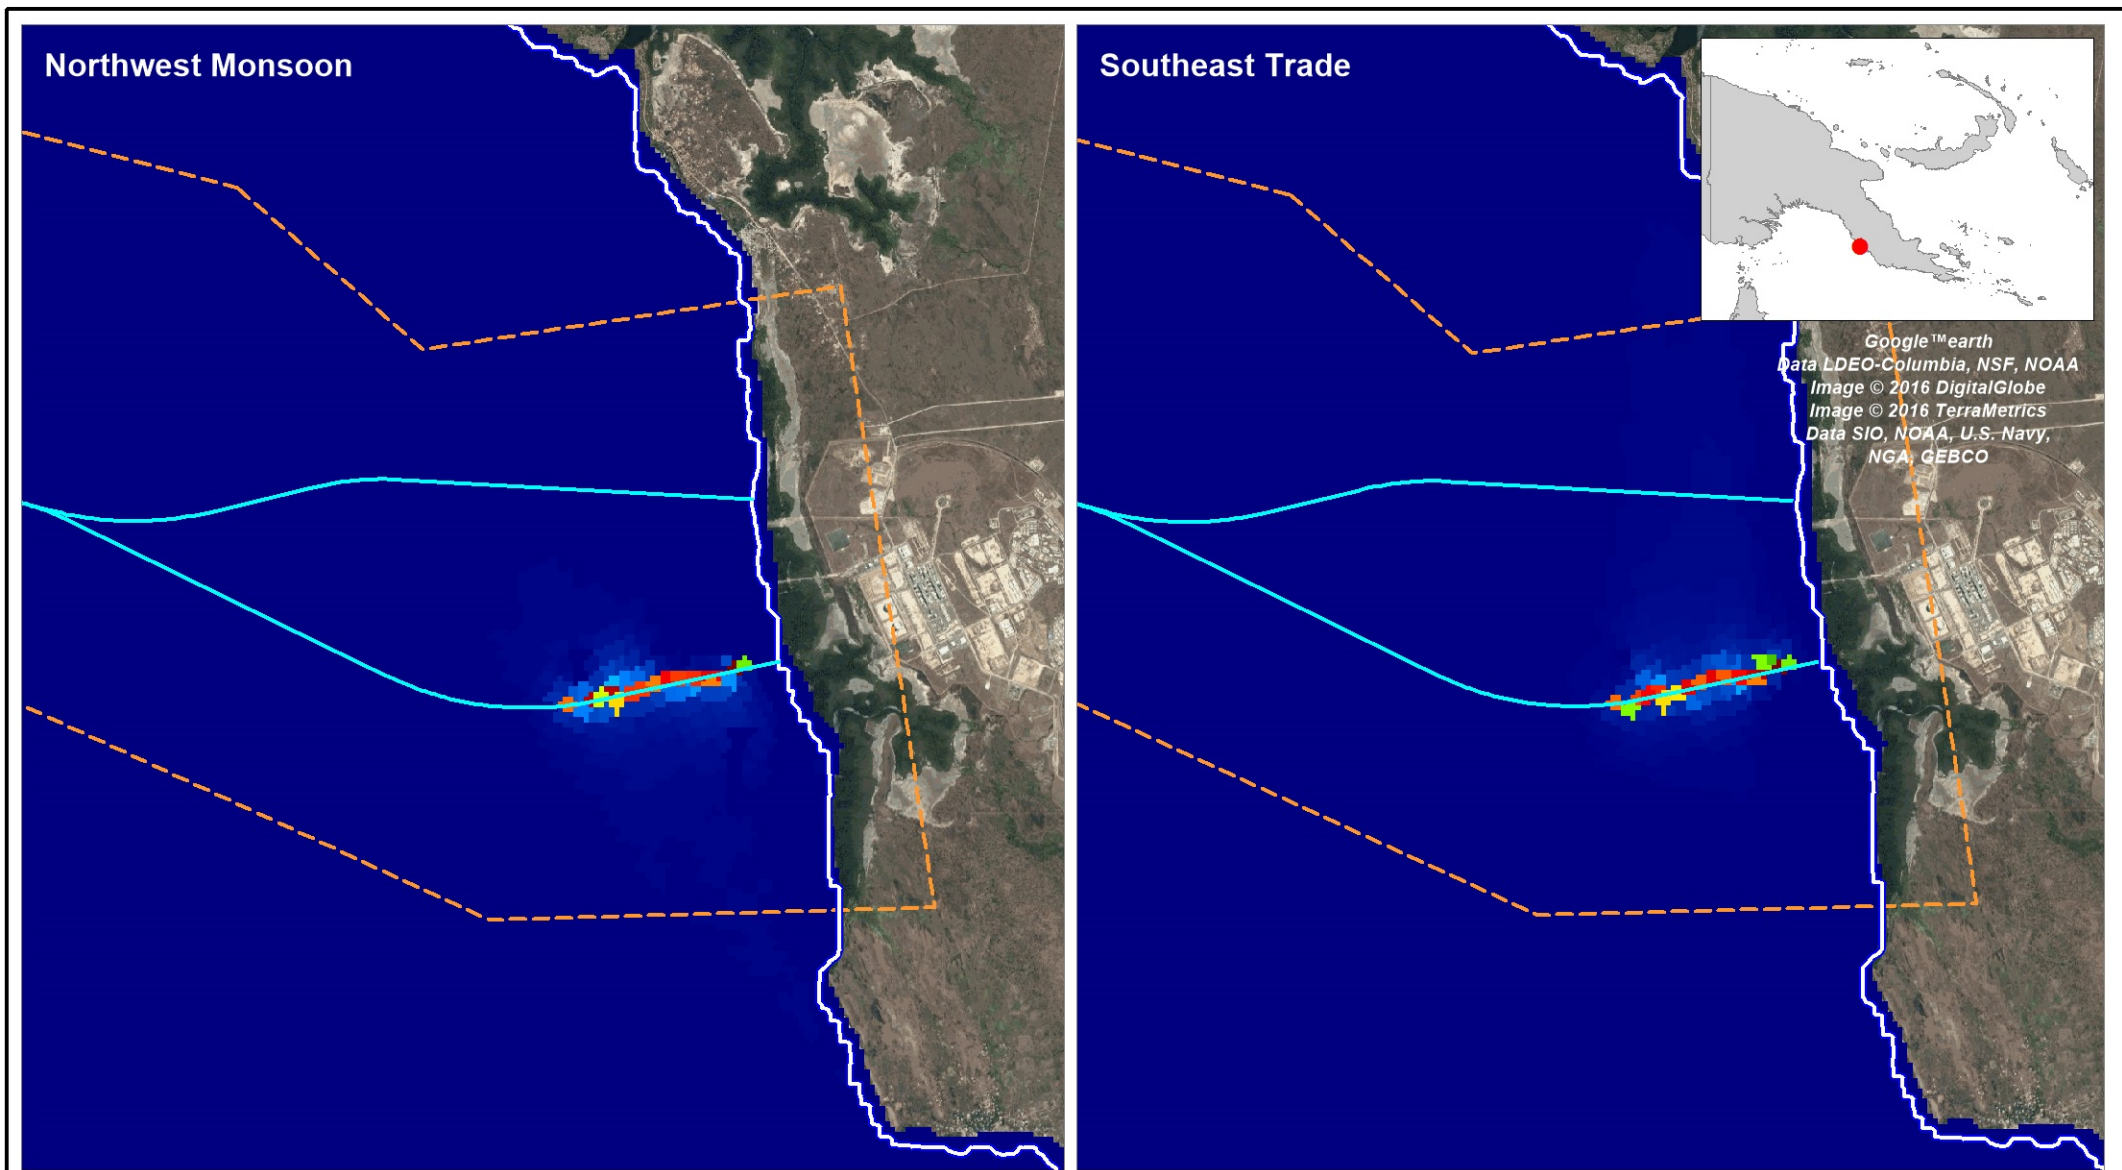

LEGEND

- Papua LNG Pipeline Routes
- Lowest Astronomical Tide
- Pipeline Corridor



Title:

Final Net Deposition of Sediment Mobilized from Trenching of Cautin Bay - Southern Alignment

BMT WBM endeavours to ensure that the information provided in this map is correct at the time of publication. BMT WBM does not warrant, guarantee or make representations regarding the currency and accuracy of information contained in this map.



Figure:
4-9


Rev:
A



Filepath: I:\B21414_I_GML_Elk_Antelope_EIA_JV\DRG\ECO_086f_190418_Cautin_Deprate_South.wor

BMT has a proven record in addressing today's engineering and environmental issues.

Our dedication to developing innovative approaches and solutions enhances our ability to meet our client's most challenging needs.

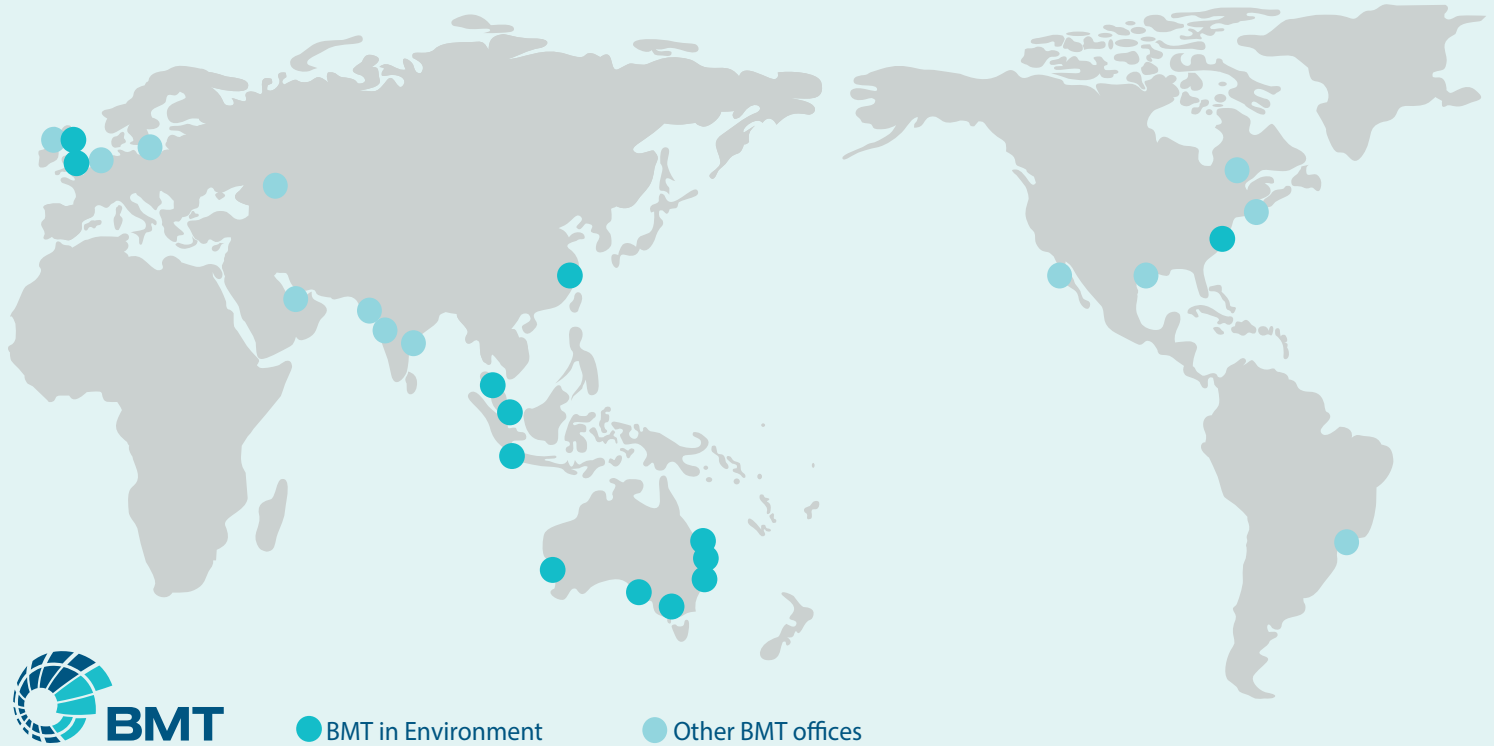

Brisbane

Level 8, 200 Creek Street
Brisbane Queensland 4000
PO Box 203 Spring Hill Queensland 4004
Australia
Tel +61 7 3831 6744
Fax +61 7 3832 3627
Email brisbane@bmtglobal.com

Melbourne

Level 5, 99 King Street
Melbourne Victoria 3000
Australia
Tel +61 3 8620 6100
Fax +61 3 8620 6105
Email melbourne@bmtglobal.com

Newcastle

126 Belford Street
Broadmeadow New South Wales 2292
PO Box 266 Broadmeadow
New South Wales 2292
Australia
Tel +61 2 4940 8882
Fax +61 2 4940 8887
Email newcastle@bmtglobal.com

Adelaide

5 Hackney Road
Hackney Adelaide South Australia 5069
Australia
Tel +61 8 8614 3400
Email info@bmttdt.com.au

Northern Rivers

Suite 5
20 Byron Street
Bangalow New South Wales 2479
Australia
Tel +61 2 6687 0466
Fax +61 2 6687 0422
Email northernrivers@bmtglobal.com

Sydney

Suite G2, 13-15 Smail Street
Ultimo Sydney New South Wales 2007
Australia
Tel +61 2 8960 7755
Fax +61 2 8960 7745
Email sydney@bmtglobal.com

Perth

Level 4
20 Parkland Road
Osborne Park Western Australia 6017
PO Box 2305 Churchlands Western Australia 6018
Australia
Tel +61 8 6163 4900
Email wa@bmtglobal.com

London

6th Floor, 150 Minories
London
EC3N 1LS
UK
Tel +44 (0) 20 8090 1566
Email london@bmtglobal.com

Leeds

Platform
New Station Street
Leeds, LS1 4JB
UK
Tel: +44 (0) 113 328 2366
Email environment.env@bmtglobal.com

Aberdeen

Broadfold House
Broadfold Road, Bridge of Don
Aberdeen, AB23 8EE
UK
Tel: +44 (0) 1224 414 200
Email aberdeen@bmtglobal.com

Asia Pacific

Indonesia Office
Perkantoran Hijau Arkadia
Tower C, P Floor
Jl: T.B. Simatupang Kav.88
Jakarta, 12520
Indonesia
Tel: +62 21 782 7639
Email asiapacific@bmtglobal.com

Alexandria

4401 Ford Avenue, Suite 1000
Alexandria
VA 22302
USA
Tel: +1 703 920 7070
Email inquiries@dandp.com

